

5" Cylinder

35W LED Pendant (Round or Square)


Catalog #:

Type:

Project:

Date:

Notes:

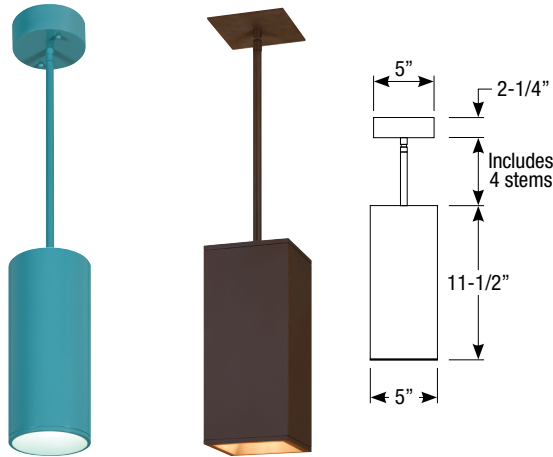

STANDARD FINISHES

| | |
|---------------------------------------|-------------------------------------|
| ABL (Aegean Blue) | PNC (Painted Natural Copper) |
| BB (Burnished Bronze) | RD (Red) |
| BK (Gloss Black) | SGR (Sage Green) |
| BLU (Blue) | SND (Sand) |
| DVG (Dove Gray) | SS (Satin Silver) |
| FLG (Flannel Gray) | TBZ (Textured Bronze) |
| GA (Galvanized) | TGP (Textured Graphite) |
| GWT (Gloss White) | TNG (Tangerine) |
| LG (Lime Green) | TTL (Tahitian Teal) |
| MB (Matte Black) | WT (Semi Gloss White) |
| MBL (Midnight Blue) | YEL (Yellow) |
| PNA (Painted Natural Aluminum) | |

Electrical Data

| CCT | CRI | Wattage | Delivered Lumens | Efficacy |
|-------|--------|---------|------------------|----------|
| 2700K | 90 CRI | 35W | 2265lm | 65lpw |
| 3000K | 90 CRI | 35W | 2401lm | 69lpw |
| 3500K | 90 CRI | 35W | 2401lm | 69lpw |
| 4000K | 90 CRI | 35W | 2569lm | 73lpw |

Multiplier for Delivered Lumens

| Wattage | 10 | 15 | 20 | 25 | 30 | 35 |
|------------|------|-----|------|------|------|----|
| Multiplier | 0.34 | 0.5 | 0.61 | 0.73 | 0.81 | 1 |

Specifications

Field Replaceable LED Light Engine

- LED with 2 SDCM binning
- 2700K, 3000K, 3500K and 4000K at 90 CRI
- 10°, 30°, 50° and 80° optics

- 5" x 2-1/4" canopy included with standard universal dim driver (7-1/8" x 2-1/4" round canopy or 6-1/4" x 2-1/4" square canopy included with Lutron and eldoLED drivers)

Field Replaceable Dimming Driver

- Multiple dimming drivers available
- Power factor > 0.9, 50/60Hz

Finishes

Available in 22 standard finishes with optional coastal coating to protect finish in coastal environments.

Mounting

- 4' of stem included; (1) 6", (2) 12" & (1) 18" (includes couplers)
- Contact the factory for custom sloped ceiling projects
- 10' field adjustable cord available, must specify

Listing / Warranty

- Five (5) year limited warranty
- UL listed to US and Canadian standards for Damp locations



Order Matrix

5" Cylinder (Example: LP5-35-30-10-BK-2-S-BC)

| Series | Wattage | CCT / CRI | Optic | Finish | Coastal Coating | Rev | Driver | Hanging Option | Canopy | |
|------------------|---------|-------------------|--------------------------|---------------------------------|----------------------|-----|---|--------------------|---|------------------------------------|
| LP5 (Round) | -10 | -27 (2700K/90CRI) | -10 | -ABL (Aegean Blue) | (blank) (No coating) | -2 | -S ² (ERP, Universal Dim, Triac/ELV/0-10V 1% 120-277V) | -ST Stem | (blank) (standard canopy) | |
| | -15 | -30 (3000K/90CRI) | -30 | -BB (Burnished Bronze) | -C (Coating) | | | | -CC1 ³ (Conduit 3-1/4" canopy) | |
| | -20 | -35 (3500K/90CRI) | -50 | -BK (Gloss Black) | | | | | -CC2 ³ (Conduit 3-7/8" canopy) | |
| SLP5 (Square) | -25 | -40 (4000K/90CRI) | -80 | -BLU (Blue) | | | -L3 ¹ (Lutron Hi-lume® Fade-to-Black 1% 120-277V) | -WC 10' White Cord | | |
| | -30 | | | -DVG (Dove Gray) | | | | | -EL1 ¹ (eldoLED DALI 1% 120-277V) | -LV 10' Low Voltage Aircraft Cable |
| | -35 | | | -FLG (Flannel Gray) | | | | | -EL2 ¹ (eldoLED 0-10V 1% 120-277V) | |
| | | | | -GA (Galvanized) | | | | | -DMX ¹ (DMX 1% 120-277V) | |
| | | | | -GWT (Gloss White) | | | | | | |
| | | | | -LG (Lime Green) | | | | | | |
| | | | | -MBL (Midnight Blue) | | | | | | |
| | | | | -MB (Matte Black) | | | | | | |
| | | | | -PNA (Painted Natural Aluminum) | | | | | | |
| | | | | -PNC (Painted Natural Copper) | | | | | | |
| | | | -RD (Red) | | | | | | | |
| | | | -SGR (Sage Green) | | | | | | | |
| | | | -SND (Sand) | | | | | | | |
| | | | -SS (Satin Silver) | | | | | | | |
| | | | -TBZ (Textured Bronze) | | | | | | | |
| | | | -TGP (Textured Graphite) | | | | | | | |
| | | | -TNG (Tangerine) | | | | | | | |
| | | | -TTL (Tahitian Teal) | | | | | | | |
| | | | -WT (Semi Gloss White) | | | | | | | |
| | | | -YEL (Yellow) | | | | | | | |

Emergency

| | |
|-------------------|--------------------------------|
| EM-1000 | (25W Remote Inverter) |
| EM-1002 | (10W Remote Inverter) |
| EM-1003 | (35W Remote Inverter) |
| EM-1003-CA | (35W Remote Inverter) Title 20 |
| EM-1004 | (50W Remote Inverter) |
| EM-1006 | (25W Remote Inverter) Title 20 |

Optic

| | |
|------------------------|------------|
| EDL5-10-OPTIC-1 | (10° Spot) |
| EDL5-30-OPTIC-1 | (30° Spot) |
| EDL5-50-OPTIC-1 | (50° Spot) |
| EDL5-80-OPTIC-1 | (80° Spot) |

- Includes larger canopy
- Forward and reverse dimming at 120V only

- CC1 and CC2 only for S driver option

Spec-00229 Revised 10/14/2022

14508 Nelson Ave. City of Industry, CA 91744 • tel: 626.336.4511 • fax: 626.330.4266 • www.cslighting.com
 ©2021 Creative Systems Lighting, A Division of Troy-CSL Lighting, Inc.
 All rights reserved. Subject to change without notice.

