


#### TRIM STYLE



#### TRIMLESS STYLE

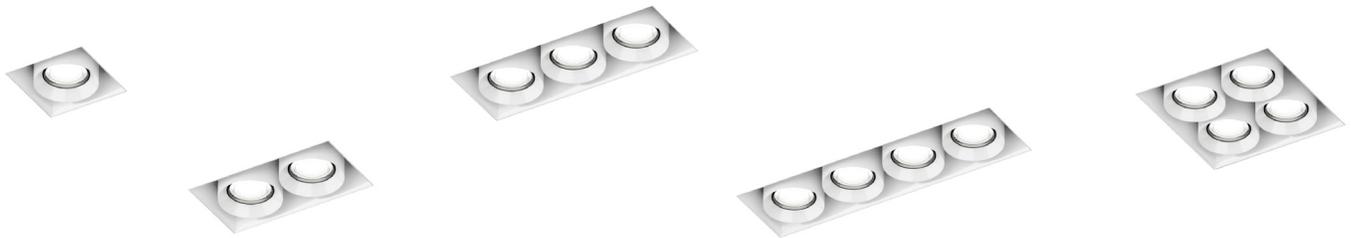

#### LED LIGHT ENGINE

RATED WATTAGE	10W, 15W
DELIVERED LUMENS	Up to 1143 lm Per Head
EFFICACY	Up to 89 lpw Per Head
CCT @ 90CRI	2700K, 3000K, 3500K, 4000K
COLOR QUALITY	90+ CRI, 2-Step SDCM
LED LIFETIME	55,000 hours @ L70

#### SILENT VU™ OPTICS TECHNOLOGY

OPTICS	10°, 30°, 50° Installed
ADJUSTABLE	45° tilt, Infinite Rotation, Tool Free Locking Below Ceiling
MEDIA	Clear, Solite, Frosted, Linear Spread, Wall Wash

#### POWER SUPPLY

INPUT VOLTAGE	120-277V, or 120V
DIMMING	TRIAC, ELV, 0-10V, EcoSystem®, Dali

#### DELIVERED LUMENS MATRIX - LUMENS PER LIGHT

10W	10° Optic	30° Optic	50° Optic
2700K (90CRI)	861 lm	949 lm	859 lm
3000K (90CRI)	914 lm	1007 lm	912 lm
3500K (90CRI)	958 lm	1055 lm	956 lm
4000K (90CRI)	994 lm	1094 lm	992 lm
15W	10° Optic	30° Optic	50° Optic
2700K (90CRI)	1275 lm	1404 lm	1272 lm
3000K (90CRI)	1353 lm	1490 lm	1350 lm
3500K (90CRI)	1418 lm	1562 lm	1415 lm
4000K (90CRI)	1471 lm	1620 lm	1467 lm

#### TRIM OPTIONS

- Trim
- Trimless


#### HOUSING INSTALLATION

- New Construction IC box, Chicago Plenum
- 5/8" – 1 1/4" ceiling thickness
- Minimum Plenum Height: XX"
- Ceiling Material: Drywall, T-bar grid
- Hanger bars and butterfly brackets included
- Steel housing and junction box, 1/2" knockouts

#### LISTINGS AND WARRANTY

- cULus Listed to US and Canadian standards for Damp Locations
- Five (5) years limited warranty
- CA Title 24 JA-8 Compliant



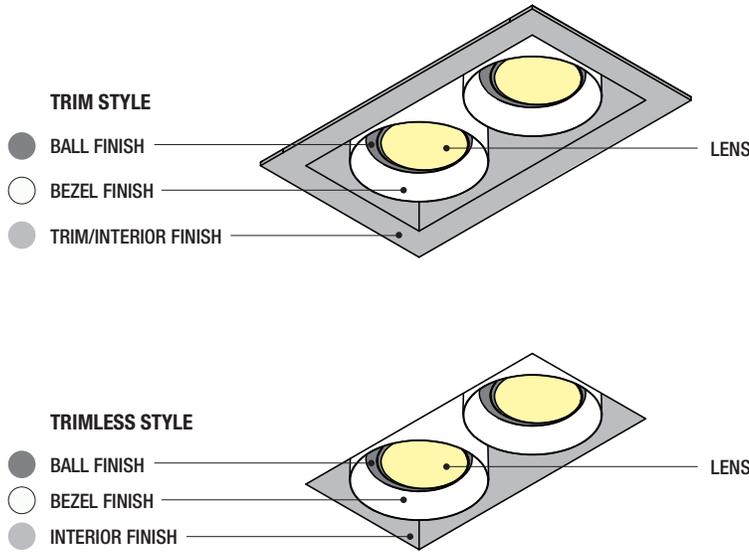

#### FINISH

- **ABL** (Aegean Blue)
- **PNC** (Painted Natural Copper)
- **BB** (Burnished Bronze)
- **RD** (Red)
- **BK** (Gloss Black)
- **SGR** (Sage Green)
- **BLU** (Blue)
- **SND** (Sand)
- **DVG** (Dove Gray)
- **SS** (Satin Silver)
- **FLG** (Flannel Gray)
- **TBZ** (Textured Bronze)
- **GA** (Galvanized)
- **TGP** (Textured Graphite)
- **GWT** (Gloss White)
- **TNG** (Tangerine)
- **LG** (Lime Green)
- **TTL** (Tahitian Teal)
- **MB** (Matte Black)
- **WT** (Semi Gloss White)
- **MBL** (Midnight Blue)
- **YEL** (Yellow)
- **PNA** (Painted Natural Aluminum)

## ORDER MATRIX

### TRIM ORDER MATRIX (EXAMPLE: S2-1LTL-BKBKBK-279010-CLFR-00)

TRIM STYLE	BALL FINISH	BEZEL FINISH	TRIM/INTERIOR	CCT	CRI	OPTIC	MEDIA 1	MEDIA 2	REV
<b>S2-1L</b> 1 Light	<b>-ABL</b> (Aegean Blue)	<b>ABL</b>	<b>ABL</b>	<b>-27</b> (2700K)	<b>90</b> (CRI)	<b>-10</b> (10°)	<b>-NL</b> (No Lens)	<b>-NL</b> (No Lens)	<b>-00</b>
<b>S2-1LTL</b> 1 Light Trimless	<b>-BB</b> (Burnished Bronze)	<b>BB</b>	<b>BB</b>	<b>-30</b> (3000K)		<b>-30</b> (30°)	<b>-CL</b> (Clear Lens)	<b>-CL</b> (Clear Lens)	
	<b>-BK</b> (Gloss Black)	<b>BK</b>	<b>BK</b>	<b>-35</b> (3500K)		<b>-50</b> (50°)	<b>-FR</b> (Frosted)	<b>-FR</b> (Frosted)	
	<b>-BLU</b> (Blue)	<b>BLU</b>	<b>BLU</b>	<b>-40</b> (4000K)			<b>-MP</b> (Solite)	<b>-MP</b> (Solite)	
<b>S2-2L</b> 2 Light	<b>-DVG</b> (Dove Gray)	<b>DVG</b>	<b>DVG</b>				<b>-LS</b> (Linear Spread)	<b>-LS</b> (Linear Spread)	
<b>S2-2LTL</b> 2 Light Trimless	<b>-FLG</b> (Flannel Gray)	<b>FLG</b>	<b>FLG</b>				<b>-HEX</b> (Hex Cell)	Holds 1 Media only when HEX or WW selected.	
	<b>-GA</b> (Galvanized)	<b>GA</b>	<b>GA</b>				<b>-WW</b> (Wall Wash)		
<b>S2-3L</b> 3 Light	<b>-GWT</b> (Gloss White)	<b>GWT</b>	<b>GWT</b>						
<b>S2-3LTL</b> 3 Light Trimless	<b>-LG</b> (Lime Green)	<b>LG</b>	<b>LG</b>						
<b>S2-4L</b> 4 Light Linear	<b>-MB</b> (Matte Black)	<b>MB</b>	<b>MB</b>						
<b>S2-4LTL</b> 4 Light Linear Trimless	<b>-MBL</b> (Midnight Blue)	<b>MBL</b>	<b>MBL</b>						
<b>S2-4SQL</b> 4 Light Square	<b>-PNA</b> (Painted Natural Aluminum)	<b>PNA</b>	<b>PNA</b>						
<b>S2-4SQLTL</b> 4 Light Square Trimless	<b>-PNC</b> (Painted Natural Copper)	<b>PNC</b>	<b>PNC</b>						
	<b>-RD</b> (Red)	<b>RD</b>	<b>RD</b>						
	<b>-SGR</b> (Sage Green)	<b>SGR</b>	<b>SGR</b>						
	<b>-SND</b> (Sand)	<b>SND</b>	<b>SND</b>						
	<b>-SS</b> (Satin Silver)	<b>SS</b>	<b>SS</b>						
	<b>-TBZ</b> (Textured Bronze)	<b>TBZ</b>	<b>TBZ</b>						
	<b>-TGP</b> (Textured Graphite)	<b>TGP</b>	<b>TGP</b>						
	<b>-TNG</b> (Tangerine)	<b>TNG</b>	<b>TNG</b>						
	<b>-TTL</b> (Tahitian Teal)	<b>TTL</b>	<b>TTL</b>						
	<b>-WT</b> (Semi Gloss White)	<b>WT</b>	<b>WT</b>						
	<b>-YEL</b> (Yellow)	<b>YEL</b>	<b>YEL</b>						

#### MEDIA

- S2-Lens-CL-0** (Clear Lens)
- S2-Lens-FR-0** (Frosted Lens)
- S2-Lens-MP-0** (Solite Lens)
- S2-Lens-LS-0** (Linear Spread)
- S2-Lens-HEX-0\*** (Hex Louver)
- S2-Lens-WW-0\*** (Wall Wash)

#### BEAM SPREADS

Downlight      Adjustable      Wall Wash

#### OPTICS

- S2-10-OPTIC-0** (10° Spot)
- S2-30-OPTIC-0** (30° Narrow Flood)
- S2-50-OPTIC-0** (50° Flood)

10° Spot      30° Narrow Flood      50° Flood



GYROSHIFT  
MULTIPLES

**GYROSHIFT MULTIPLES  
2" ADJUSTABLE DOWNLIGHT**

PROJECT: \_\_\_\_\_

TYPE: \_\_\_\_\_

NOTE: \_\_\_\_\_


SPEC-00281 GYROSHIFT-MULTIPLES, 2", V-1.3, UPDATED 10/14/2022

S2, S2F

**ORDER MATRIX**






HOUSING ORDER MATRIX (IC OR CHICAGO RATED NEW CONSTRUCTION BOX) (EXAMPLE: S2F-1LRC-15S-00)

HOUSING SIZE	HANGING TYPE	WATTS PER LIGHT	DRIVER	REV
<b>S2F-1L</b> 1 Light Housing	<b>RI</b> (Recessed IC)	<b>-10</b> (10W)	<b>S</b> (ERP, Universal Dim, Triac/ELV/0-10V 1% 120-277V) <i>Forward and reverse phase dimming at 120V only.</i>	<b>-00</b>
<b>S2F-1LTL</b> 1 Light Trimless Housing	<b>RC</b> (Recessed Chicago Rated)	<b>-15</b> (15W)	<b>L3</b> (Lutron Hi-Lume® Fade-to-Black 1% 120-277V) <b>EL1</b> (EldoLED DALI 1% 120-277V) <b>EL2</b> (EldoLED 0-10V 1% 120-277V)	
<b>S2F-2L</b> 2 Light Housing				
<b>S2F-2LTL</b> 2 Light Trimless Housing				
<b>S2F-3L</b> 3 Light Housing				
<b>S2F-3LTL</b> 3 Light Trimless Housing				
<b>S2F-4L</b> 4 Light Linear Housing				
<b>S2F-4LTL</b> 4 Light Linear Trimless Housing				
<b>S2F-4SQL</b> 4 Light Square Housing				
<b>S2F-4SQLTL</b> 4 Light Square Trimless Housing				

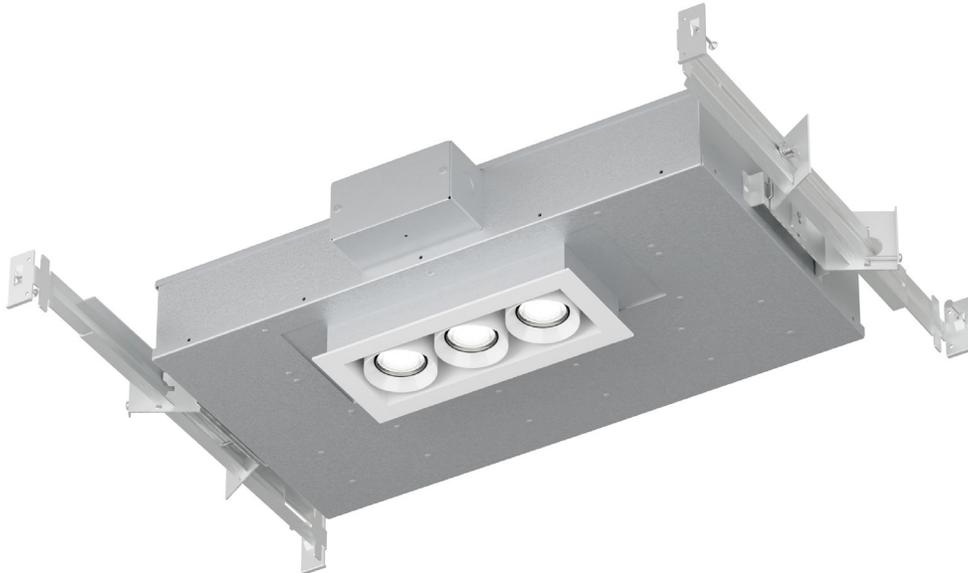

### LINE DRAWINGS






**S2F-1L**  
2" - 1 Light  
Recessed Downlight

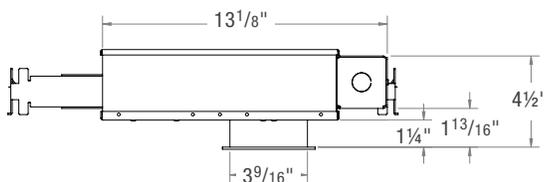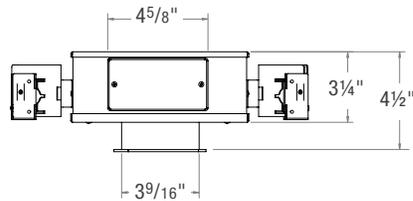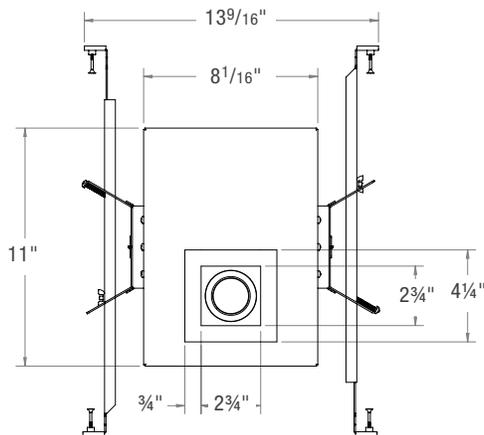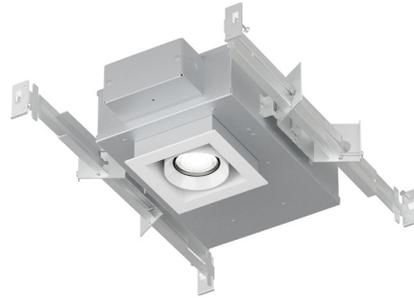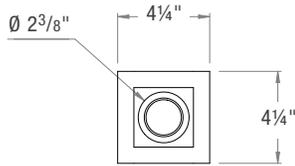

### LINE DRAWINGS

#### S2F-1LTL

2" - 1 Light Trimless  
Recessed Downlight

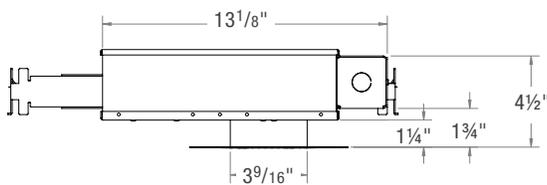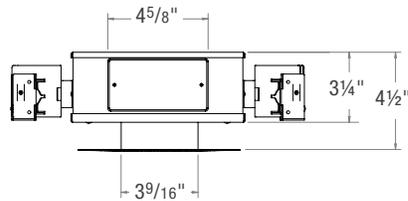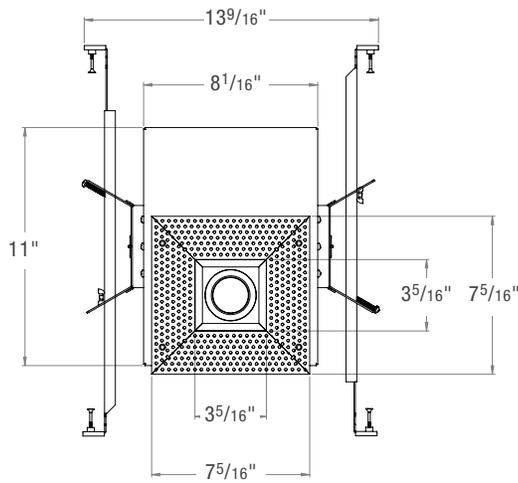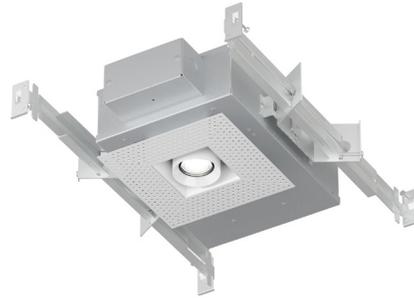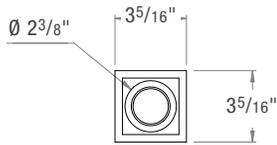

# CSL

## GYROSHIFT MULTIPLES

### GYROSHIFT MULTIPLES 2" ADJUSTABLE DOWNLIGHT

PROJECT: \_\_\_\_\_

TYPE: \_\_\_\_\_






NOTE: \_\_\_\_\_

SPEC-00281 GYROSHIFT-MULTIPLES, 2", V-1.3, UPDATED 10/14/2022

S2, S2F

### LINE DRAWINGS

**S2F-2L**  
2" - 2 Light  
Recessed Downlight

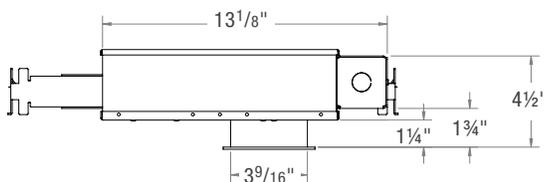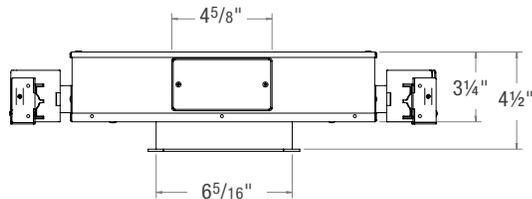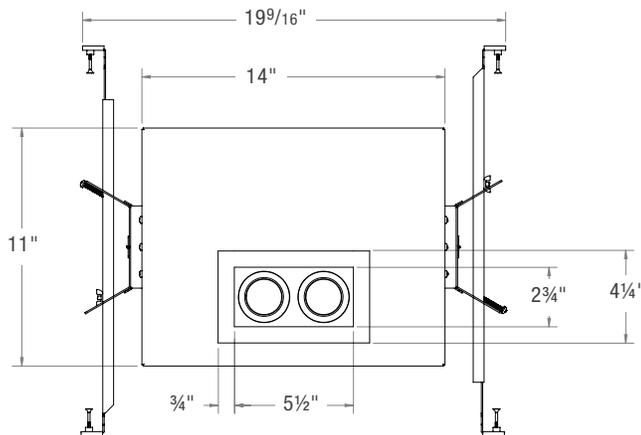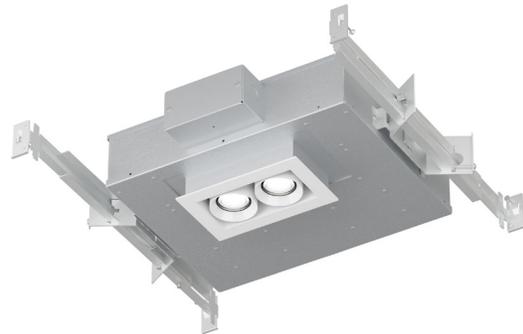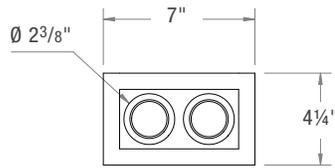

# CSL

## GYROSHIFT MULTIPLES

### GYROSHIFT MULTIPLES 2" ADJUSTABLE DOWNLIGHT

PROJECT: \_\_\_\_\_

TYPE: \_\_\_\_\_

NOTE: \_\_\_\_\_





SPEC-00281 GYROSHIFT-MULTIPLES, 2", V-1.3, UPDATED 10/14/2022

S2, S2F

### LINE DRAWINGS

#### S2F-2TL

2" - 2 Light Trimless  
Recessed Downlight

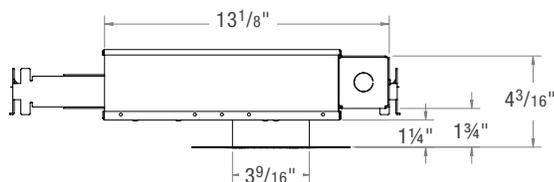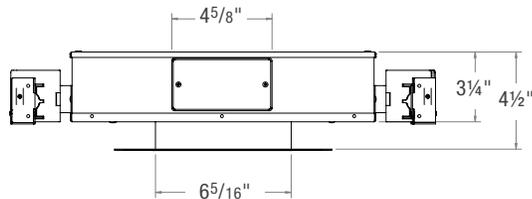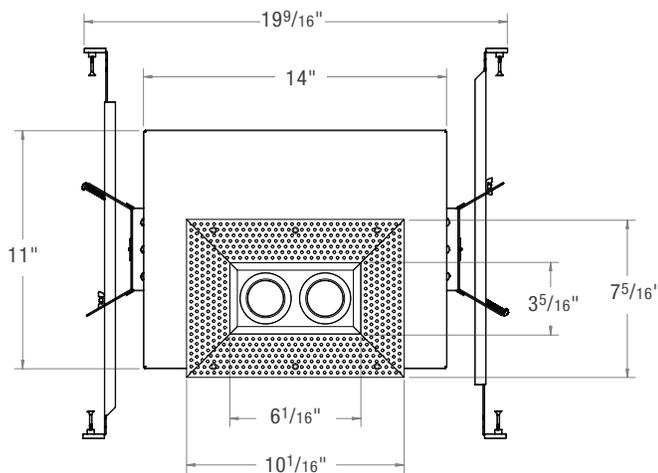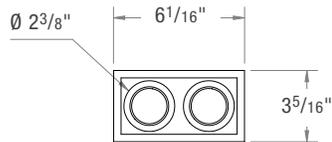

# CSL

## GYROSHIFT MULTIPLES

### GYROSHIFT MULTIPLES 2" ADJUSTABLE DOWNLIGHT

PROJECT: \_\_\_\_\_

TYPE: \_\_\_\_\_






NOTE: \_\_\_\_\_

SPEC-00281 GYROSHIFT-MULTIPLES, 2", V-1.3, UPDATED 10/14/2022

S2, S2F

### LINE DRAWINGS

**S2F-3L**  
2" - 3 Light  
Recessed Downlight

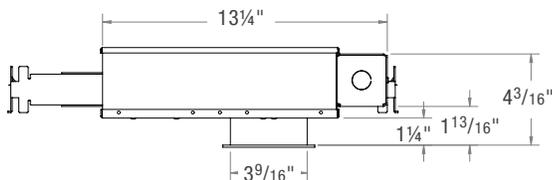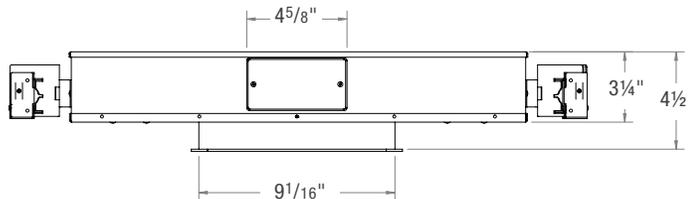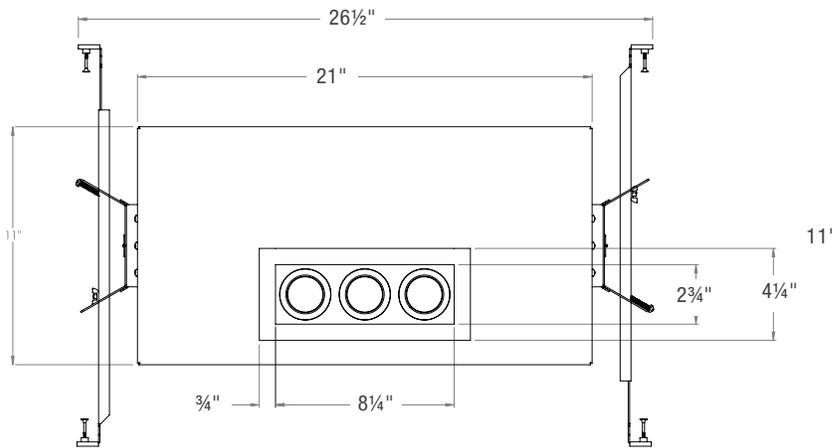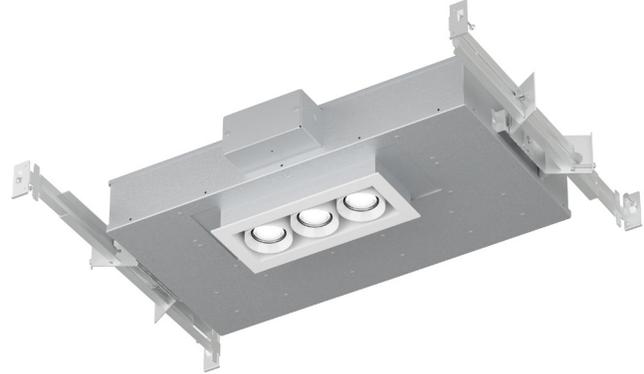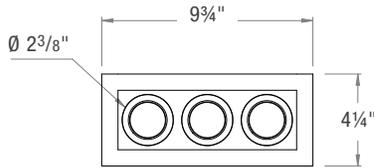

# CSL

## GYROSHIFT MULTIPLES

### GYROSHIFT MULTIPLES 2" ADJUSTABLE DOWNLIGHT

PROJECT: \_\_\_\_\_

TYPE: \_\_\_\_\_





NOTE: \_\_\_\_\_

SPEC-00281 GYROSHIFT-MULTIPLES, 2", V-1.3, UPDATED 10/14/2022

S2, S2F





### LINE DRAWINGS

**S2F-3LTL**  
2" - 3 Light Trimless  
Recessed Downlight

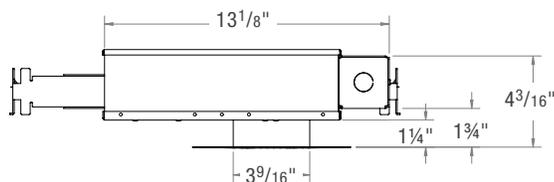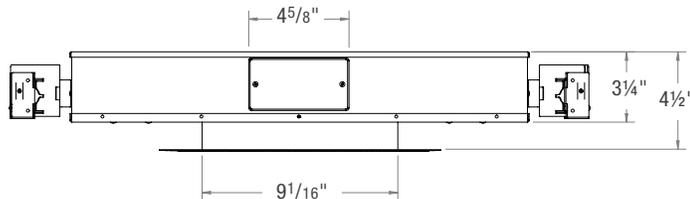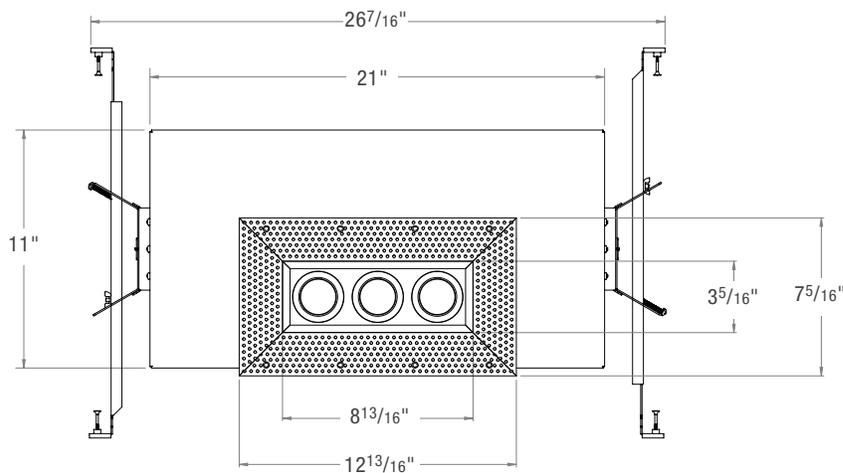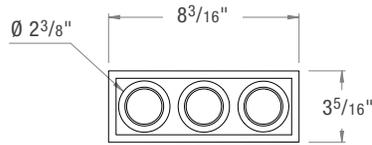


### LINE DRAWINGS

**S2F-4L**  
2" - 4 Light  
Recessed Downlight

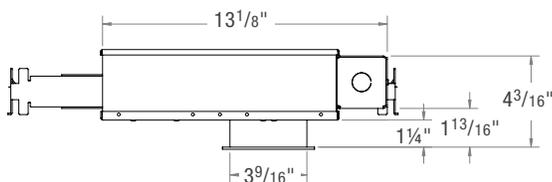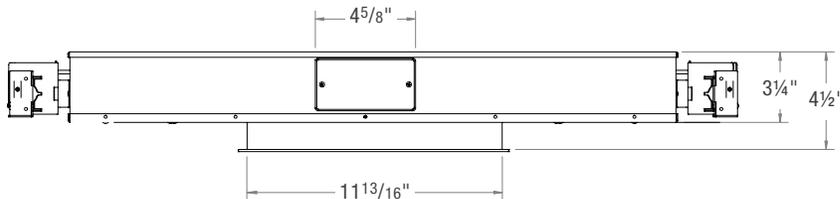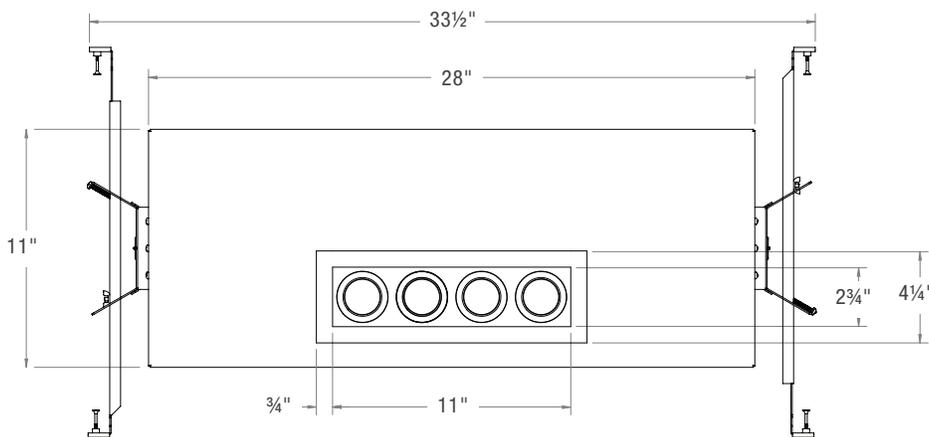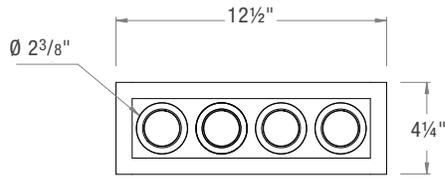





### LINE DRAWINGS

**S2F-4TL**  
2" - 4 Light Trimless  
Recessed Downlight

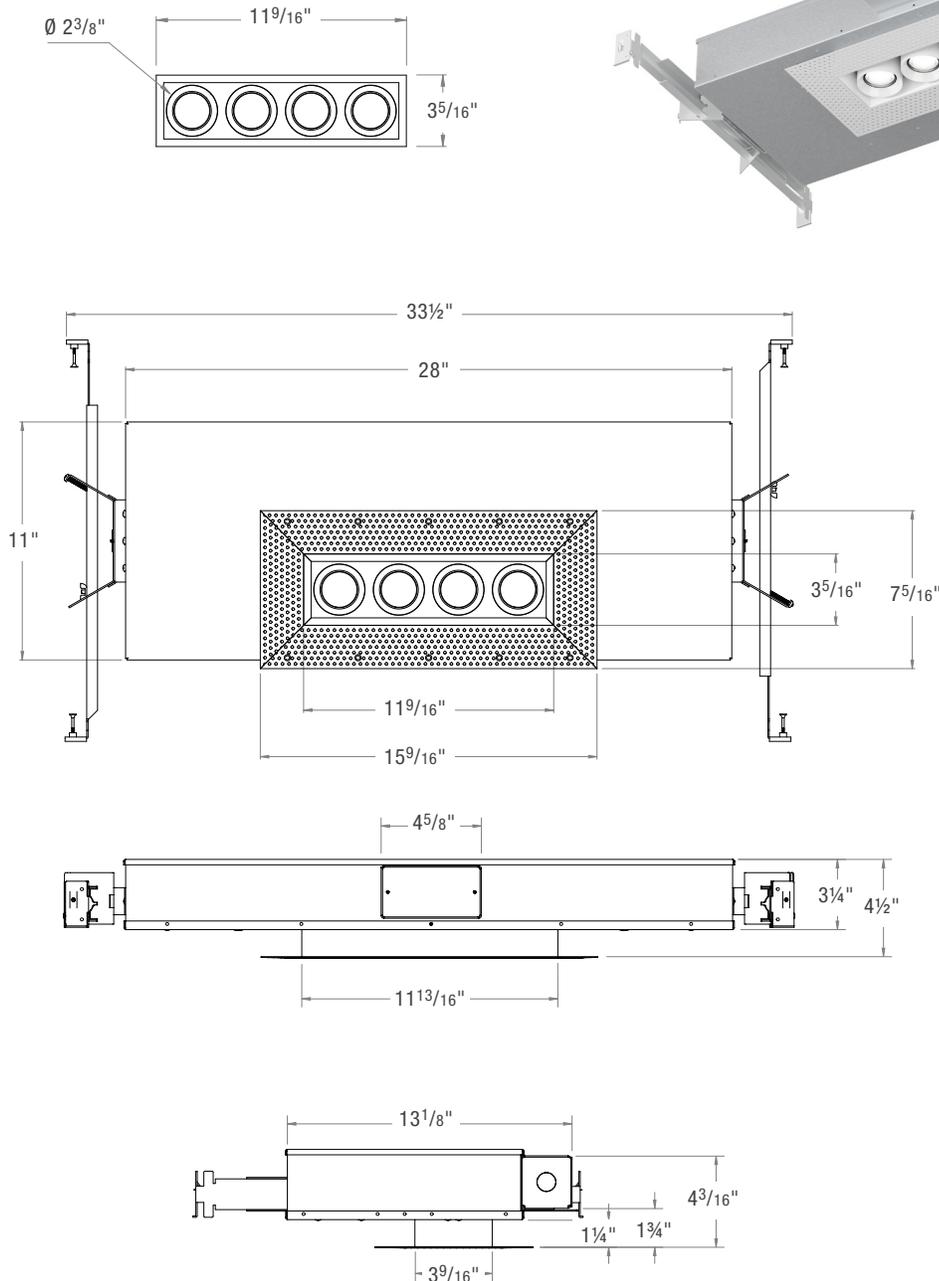

### LINE DRAWINGS

**S2F-4SQL**  
2" - 4 Light Square  
Recessed Downlight

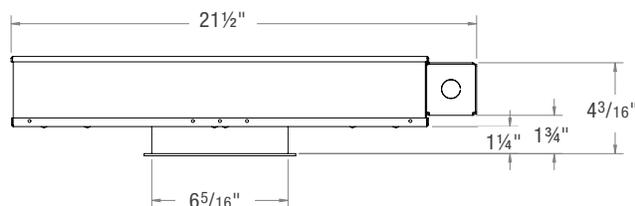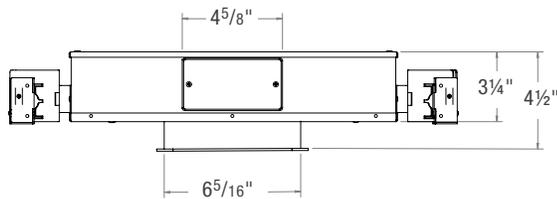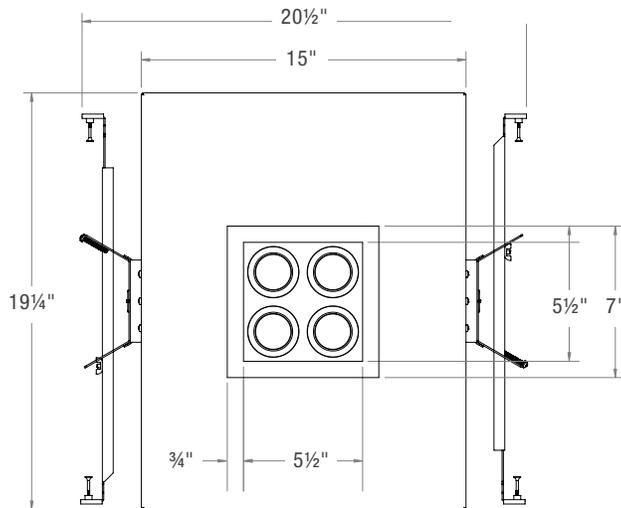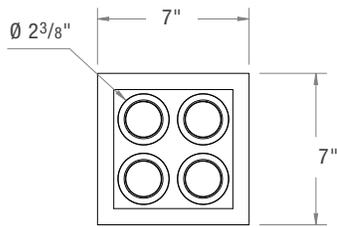

# CSL

## GYROSHIFT MULTIPLES

### GYROSHIFT MULTIPLES 2" ADJUSTABLE DOWNLIGHT

PROJECT: \_\_\_\_\_

TYPE: \_\_\_\_\_

NOTE: \_\_\_\_\_





SPEC-00281 GYROSHIFT-MULTIPLES, 2", V-1.3, UPDATED 10/14/2022

S2, S2F

### LINE DRAWINGS

#### S2F-4SQLTL

2" - 4 Light Square Trimless  
Recessed Downlight

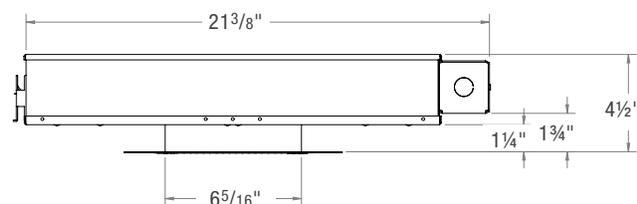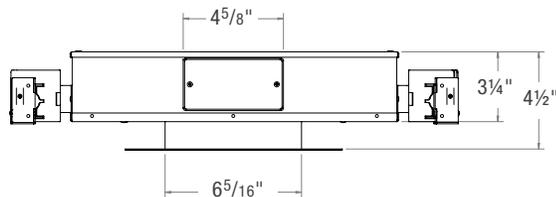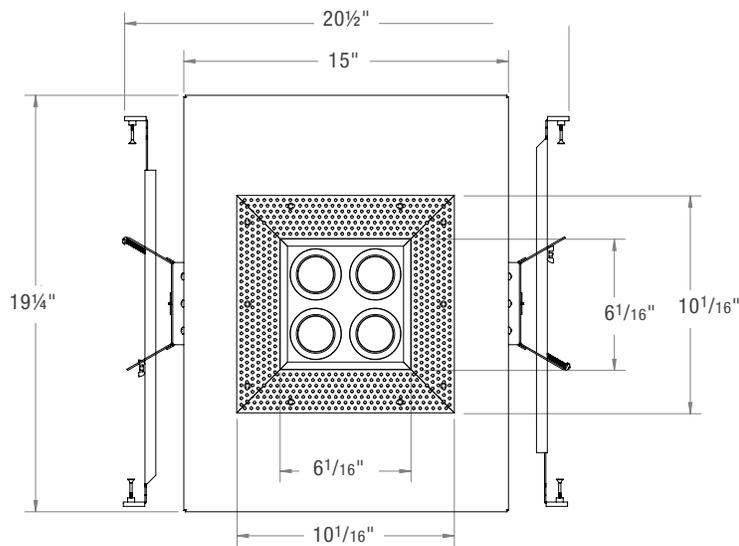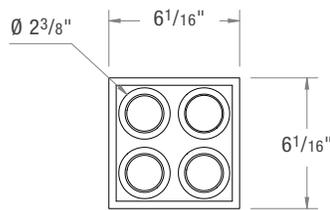

### STANDARD FINISHES



**ABL**  
Aegean Blue



**BB**  
Burnished Bronze



**BK**  
Gloss Black



**BLU**  
Blue



**DVG**  
Dove Gray



**FLG**  
Flannel Gray



**GA**  
Galvanized



**GWT**  
Gloss White



**LG**  
Lime Green



**MB**  
Matte Black



**MBL**  
Midnight Blue



**PNA**  
Painted Natural Aluminum



**PNC**  
Painted Natural Copper



**RD**  
Red



**SGR**  
Sage Green



**SND**  
Sand



**SS**  
Satin Silver



**TBZ**  
Textured Bronze



**TGP**  
Textured Graphite



**TNG**  
Tangerine



**TTL**  
Tahitian Teal



**WT**  
Semi Gloss White



**YEL**  
Yellow

### DIMMING DRIVER COMPATIBILITY


#### DIMMER LIST

"S" ERP PHASE-CUT DIMMERS			
Dimmer Information			
Manufacturer	Product	Manufacturer	Product
Cooper	DAL06P	Lightolier	ZP260QEW
	DLC03P	Lutron	CT103P
	SLC03P		DV600P
Leviton	6161		DVCL-153P
	6631-2		DVELV303P
	6633-P		FAELV500
	6673-10W		LG600P
	6683-IW		MAELV600
	IPE04		S600P
	IPI06-1LZ		S-603PG
	VPE06		SELV300P
			TG-600P
			TGCL-153P

**NOTES:**

Wiring diagrams are examples of typical installations intended to illustrate the number of wires that must be run to fixture. These diagrams are not intended to specify all equipment necessary for a given dimming circuit. Refer to specific dimmer manufacturer's documentation for details.

#### S- ERP DRIVER 2 WIRE PHASE DIMMING

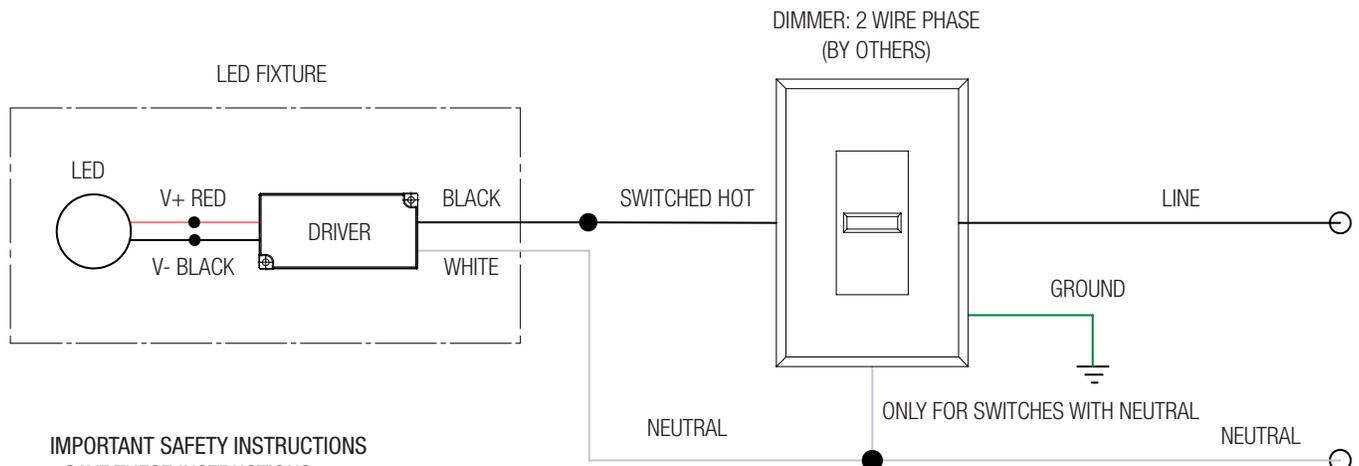

**IMPORTANT SAFETY INSTRUCTIONS  
- SAVE THESE INSTRUCTIONS**

1. Keep these instructions in a safe place for future reference.
2. Only qualified electricians in accordance to local codes should install these fixtures.
3. De-energize the electrical circuit at the circuit breaker prior to installation process or servicing.
4. Make sure all connections are in accordance with the National Electrical Code and any local regulations.
5. Cap any wires not used separately (not together).

### DIMMING DRIVER COMPATIBILITY


#### DIMMER LIST

"S" ERP 0-10V	
Dimmer Information	
Manufacturer	Product
Leviton	IP740-DLZ
Lightolier	ZP600FAM120
	V2000FAMU
Lutron	DVTV
	NTFTV
Crestron	CLS-EXP-DIMFLV
	DIN-4DIMFLV4
	DIN-A08
	GLX-DIMFLV8

**NOTES:**

Wiring diagrams are examples of typical installations intended to illustrate the number of wires that must be run to fixture. These diagrams are not intended to specify all equipment necessary for a given dimming circuit. Refer to specific dimmer manufacturer's documentation for details.

#### S- ERP DRIVER 0-10V DIMMING

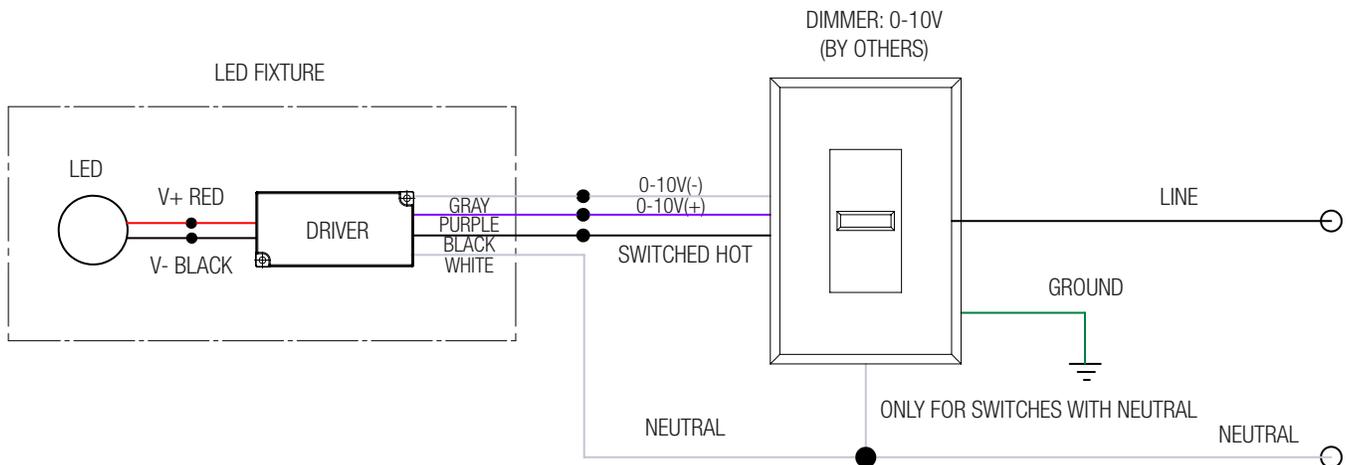

**IMPORTANT SAFETY INSTRUCTIONS**

**- SAVE THESE INSTRUCTIONS**

1. Keep these instructions in a safe place for future reference.
2. Only qualified electricians in accordance to local codes should install these fixtures.
3. De-energize the electrical circuit at the circuit breaker prior to installation process or servicing.
4. Make sure all connections are in accordance with the National Electrical Code and any local regulations.
5. Cap any wires not used separately (not together).

### DIMMING DRIVER COMPATIBILITY


#### DIMMER LIST

"L1" Lutron Hi-lume 2-Wire	
Dimmer Information	
Manufacturer	Product
Leviton	IPE04
	IPI06-1LZ
	6633-P
Lutron	DVELV300P
	DVCL-153P
	S600P
Cooper	DAL06P
	DLC03P
	SLC03P

**NOTES:**

Wiring diagrams are examples of typical installations intended to illustrate the number of wires that must be run to fixture. These diagrams are not intended to specify all equipment necessary for a given dimming circuit. Refer to specific dimmer manufacturer's documentation for details.

#### L1- LUTRON DRIVER 2-WIRE DIMMING

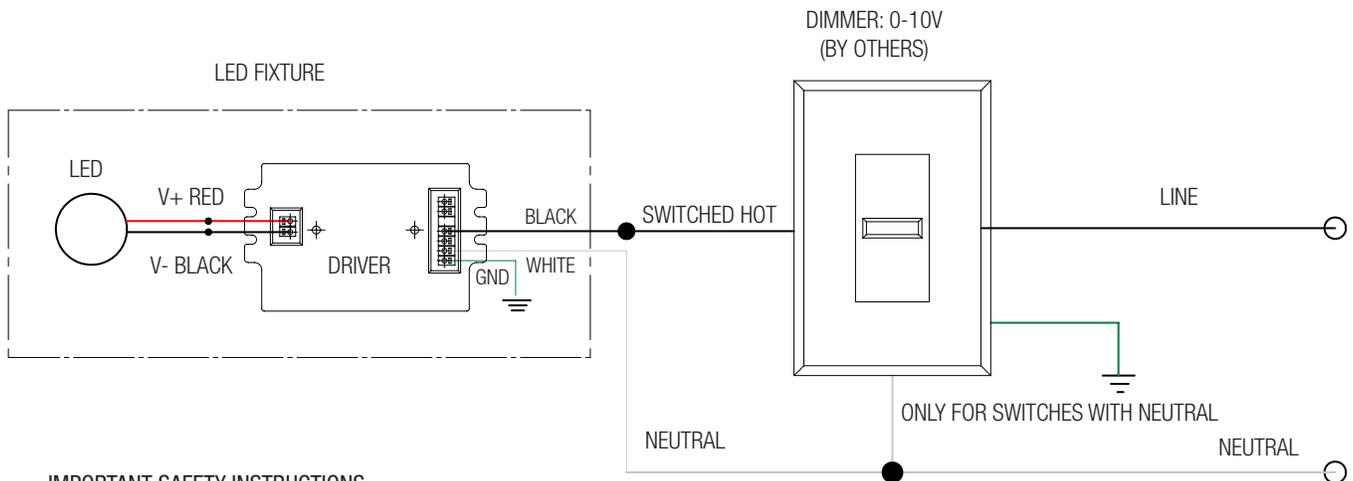

**IMPORTANT SAFETY INSTRUCTIONS**

**- SAVE THESE INSTRUCTIONS**

1. Keep these instructions in a safe place for future reference.
2. Only qualified electricians in accordance to local codes should install these fixtures.
3. De-energize the electrical circuit at the circuit breaker prior to installation process or servicing.
4. Make sure all connections are in accordance with the National Electrical Code and any local regulations.
5. Cap any wires not used separately (not together).

### DIMMING DRIVER COMPATIBILITY


#### DIMMER LIST

"L3" Lutron Fade-to-Black	
Dimmer Information	
Manufacturer	Product
Lutron	LQSE-2ECO-D
	RMJ-ECO32-DV-B
	FCJ/FCJS-ECO
	QSN-1ECO-S
	QSN-2ECO-S
	EcoSystem ESN
	Grafik Eye QS with EcoSystem
	Quantum

#### NOTES:

Wiring diagrams are examples of typical installations intended to illustrate the number of wires that must be run to fixture. These diagrams are not intended to specify all equipment necessary for a given dimming circuit. Refer to specific dimmer manufacturer's documentation for details.

#### L3- LUTRON FADE-TO-BLACK DRIVER EcoSystem DIMMING

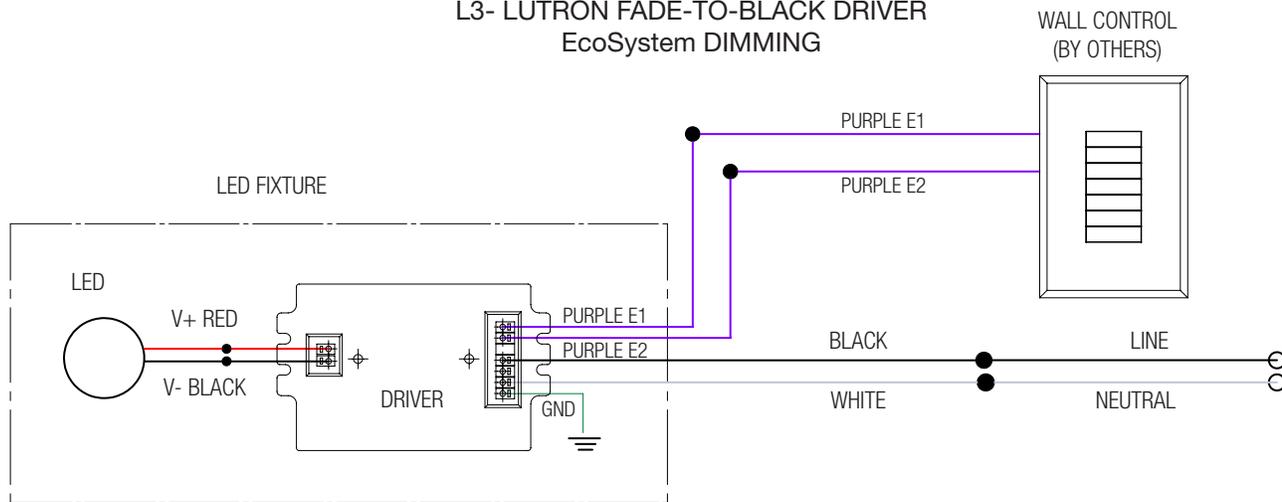

#### IMPORTANT SAFETY INSTRUCTIONS

##### - SAVE THESE INSTRUCTIONS

1. Keep these instructions in a safe place for future reference.
2. Only qualified electricians in accordance to local codes should install these fixtures.
3. De-energize the electrical circuit at the circuit breaker prior to installation process or servicing.
4. Make sure all connections are in accordance with the National Electrical Code and any local regulations.
5. Cap any wires not used separately (not together).

### DIMMING DRIVER COMPATIBILITY


#### DIMMER LIST

"EL1" eldoLED DALI 1%	
Dimmer Information	
Manufacturer	Product
	DALI Controls

#### NOTES:

Wiring diagrams are examples of typical installations intended to illustrate the number of wires that must be run to fixture. These diagrams are not intended to specify all equipment necessary for a given dimming circuit. Refer to specific dimmer manufacturer's documentation for details.

#### EL1- eldoLED DRIVER DALI DIMMING

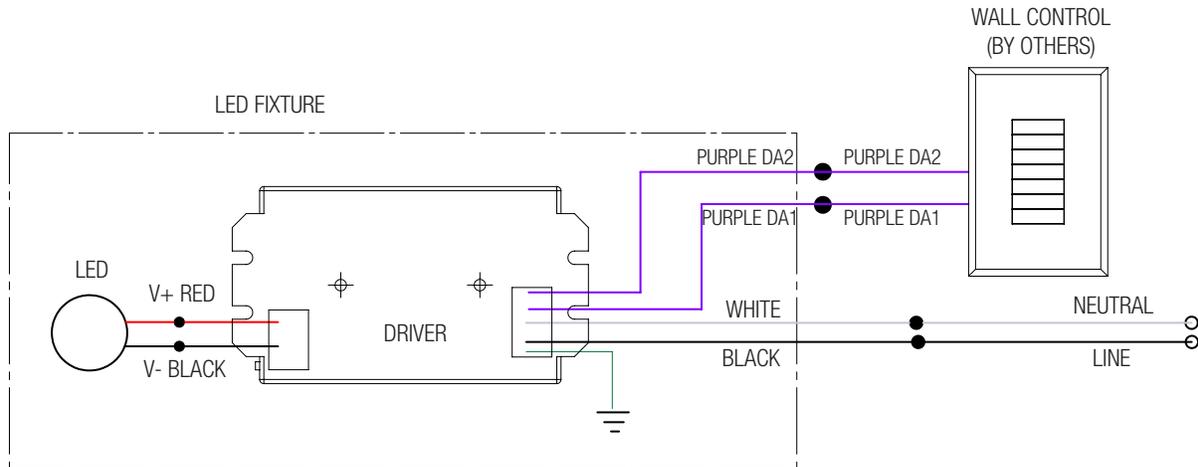

#### IMPORTANT SAFETY INSTRUCTIONS

##### - SAVE THESE INSTRUCTIONS

1. Keep these instructions in a safe place for future reference.
2. Only qualified electricians in accordance to local codes should install these fixtures.
3. De-energize the electrical circuit at the circuit breaker prior to installation process or servicing.
4. Make sure all connections are in accordance with the National Electrical Code and any local regulations.
5. Cap any wires not used separately (not together).

### DIMMING DRIVER COMPATIBILITY


#### DIMMER LIST

"EL2"eldoLED 0-10V 1%	
Dimmer Information	
Manufacturer	Product
Leviton	IP740-DLX
Lightolier	ZP600FAM120
Lutron	DVTV
	NTFTV
	NFTV
Crestron	CLS-EXP-DIMFLV
	DIN-4DIMFLV4
	DIN-A08
	GLX-DIMFLV8

#### NOTES:

Wiring diagrams are examples of typical installations intended to illustrate the number of wires that must be run to fixture. These diagrams are not intended to specify all equipment necessary for a given dimming circuit. Refer to specific dimmer manufacturer's documentation for details.

#### EL2- eldoLED DRIVER 0-10V DIMMING

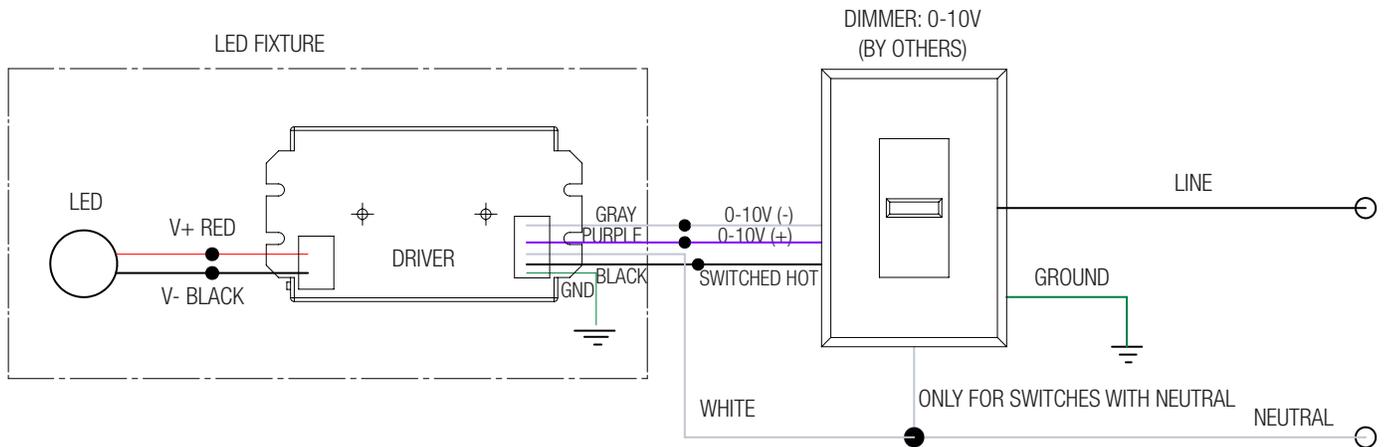

#### IMPORTANT SAFETY INSTRUCTIONS

##### - SAVE THESE INSTRUCTIONS

1. Keep these instructions in a safe place for future reference.
2. Only qualified electricians in accordance to local codes should install these fixtures.
3. De-energize the electrical circuit at the circuit breaker prior to installation process or servicing.
4. Make sure all connections are in accordance with the National Electrical Code and any local regulations.
5. Cap any wires not used separately (not together).