

Project: _____

Type: _____

Note: _____

BULLET (LS SERIES)

FEATURES

- Aluminum Fixture Head
- 360° Horizontal & 180° Vertical Rotation
- 120/277V Input
- Integrated power supply allows the fixture to be connected directly into line voltage
- Pre-wired and ready for installation
- Dimmable with 120V with EVL/TRIAC, 120V or 277V with 0-10V dimmers

MOUNTING

- ¾" IP Miter Arm Mounts or Monopoint options

FINISH

- Matte Black or Gloss White

OPTICS

- 25°, 45°, and 65° optics included

LISTING

- UL listed to US and Canadian standards for wet locations



LS SERIES - BULLET HEAD ORDER MATRIX (Example: LBLED14MB-3)

DIAMETER	LED	FINISH	MOUNTING TYPE
LB Bullet Head	LED14^{1,2} (14W LED, 2700K, 90CRI, 980lm) <small>1. Lamps/LED included 2. Lumen are raw LED value</small>	MB Matte Black WT White	-3 (¾" IP)

MONOPOINT ORDER MATRIX (Example: 3LBMNPMB)

PIPE SIZE	MONOPOINT	FINISH
3 (¾" IP) Bullet Head	LBMNP	MB Matte Black WT White


MITER ARM MOUNT ORDER MATRIX (Example: 3LBM24MB)

PIPE SIZE	ARM TYPE	FINISH
3 (¾" IP)	LBM18 (Miter Arm - 18")	MB Matte Black
	LBM24 (Miter Arm - 24")	WT White



BULLET (LS SERIES)

HEAD



**BULLET HEAD
LB**


MONOPOINT



**MONOPOINT
LBLED14MB-3 / 3LBMNPMB**



**MONOPOINT
LBLED14WT-3 / 3LBMNPWT**

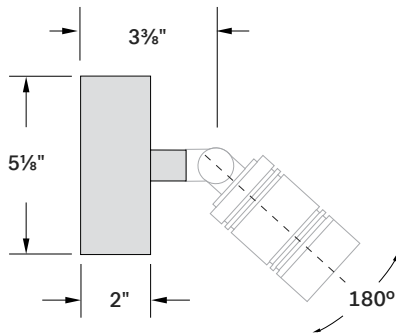

CSL

RLM

Spec-00285 Bullet (LS Series), V1.0 Rev 01/11/24

Project: _____

Type: _____


Note: _____

BULLET (LS SERIES)

MITER ARM



MITER ARM
LBLED14MB-3 / 3LBM24MB

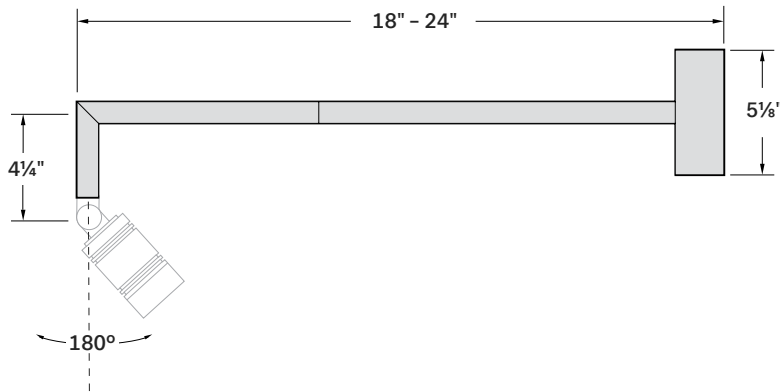

WET LOCATION  LISTED 3 of 3

CSL

CREATIVE SYSTEMS LIGHTING