


TRIM STYLE



TRIMLESS STYLE

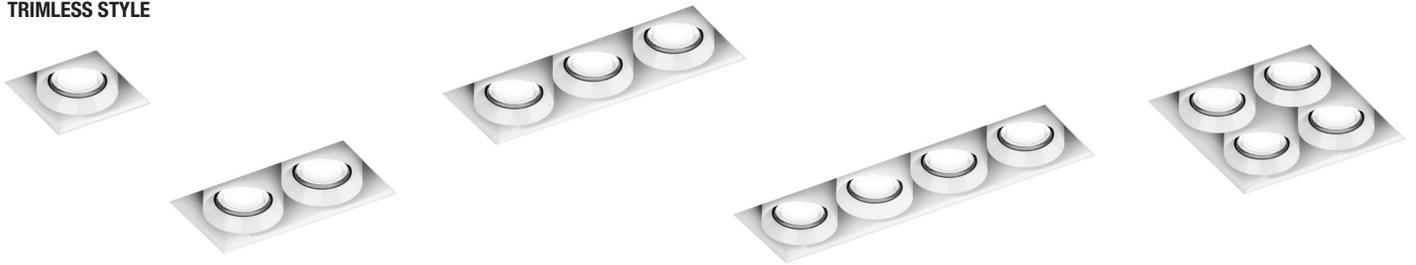

LED LIGHT ENGINE

RATED WATTAGE	10W, 15W, 20W
DELIVERED LUMENS	Up to 1739 lm Per Head
EFFICACY	Up to 97 lpw Per Head
CCT @ 90CRI	2700K, 3000K, 3500K, 4000K, Warm Dim
COLOR QUALITY	90+ CRI, 2-Step SDCM
LED LIFETIME	55,000 hours @ L70

DELIVERED LUMENS MATRIX - LUMENS PER LIGHT

		10° Optic	30° Optic	50° Optic
10W	2700K (90CRI)	861 lm	949 lm	859 lm
	3000K (90CRI)	914 lm	1007 lm	912 lm
	3500K (90CRI)	958 lm	1055 lm	956 lm
	4000K (90CRI)	994 lm	1094 lm	992 lm
	Warm Dim	556 lm	685 lm	619 lm
15W	2700K (90CRI)	1275 lm	1404 lm	1272 lm
	3000K (90CRI)	1353 lm	1490 lm	1350 lm
	3500K (90CRI)	1418 lm	1562 lm	1415 lm
	4000K (90CRI)	1471 lm	1620 lm	1467 lm
	Warm Dim	854 lm	1051 lm	950 lm
20W	2700K (90CRI)	1534 lm	1689 lm	1530 lm
	3000K (90CRI)	1628 lm	1793 lm	1624 lm
	3500K (90CRI)	1706 lm	1879 lm	1702 lm
	4000K (90CRI)	1770 lm	1949 lm	1766 lm

SILENT VU™ OPTICS TECHNOLOGY

OPTICS	10°, 30°, 50° Installed
ADJUSTABLE	45° tilt, Infinite Rotation, Tool Free Locking Below Ceiling
MEDIA	Clear, Solite, Frosted, Linear Spread, Hex Louver, Wall Wash

POWER SUPPLY

INPUT VOLTAGE	120-277V, or 120V
DIMMING	TRIAC, ELV, 0-10V, EcoSystem®, DALI

TRIM OPTIONS

- Trim
- Trimless


HOUSING INSTALLATION

- New Construction IC box, Chicago Plenum
- 5/8" – 1 1/4" ceiling thickness
- Minimum Plenum Height: XX"
- Ceiling Material: Drywall, T-bar grid
- Hanger bars and butterfly brackets included
- Steel housing and junction box, 1/2" knockouts

LISTINGS AND WARRANTY

- cULus Listed to US and Canadian standards for Damp Locations
- Five (5) years limited warranty
- CA Title 24 JA-8 Compliant



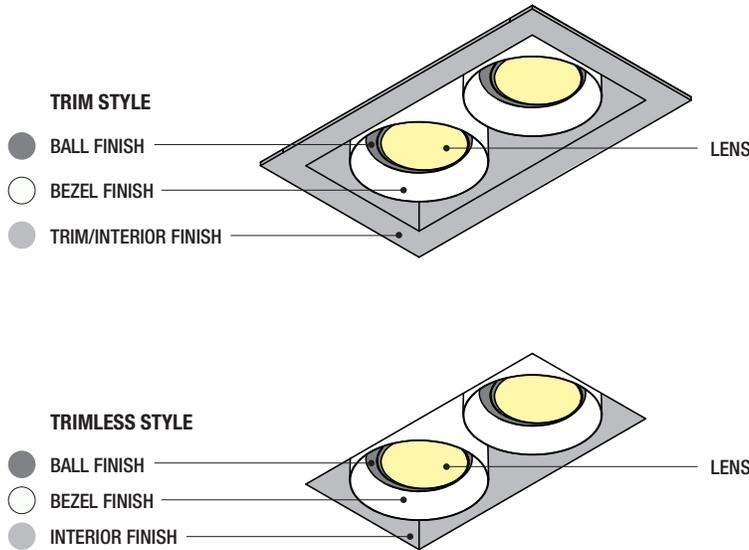

FINISH

- **ABL** (Aegean Blue)
- **PNC** (Painted Natural Copper)
- **BB** (Burnished Bronze)
- **RD** (Red)
- **BK** (Gloss Black)
- **SGR** (Sage Green)
- **BLU** (Blue)
- **SND** (Sand)
- **DVG** (Dove Gray)
- **SS** (Satin Silver)
- **FLG** (Flannel Gray)
- **TBZ** (Textured Bronze)
- **GA** (Galvanized)
- **TGP** (Textured Graphite)
- **GWT** (Gloss White)
- **TNG** (Tangerine)
- **LG** (Lime Green)
- **TTL** (Tahitian Teal)
- **MB** (Matte Black)
- **WT** (Semi Gloss White)
- **MBL** (Midnight Blue)
- **YEL** (Yellow)
- **PNA** (Painted Natural Aluminum)

ORDER MATRIX

TRIM ORDER MATRIX (EXAMPLE: S3-1LTL-BKKBK-279010-CLFR-00)

TRIM STYLE	BALL FINISH	BEZEL FINISH	TRIM/INTERIOR	CCT	CRI	OPTIC	MEDIA 1	MEDIA 2	REV
S3-1L 1 Light	-ABL (Aegean Blue)	ABL	ABL	-27 (2700K)	90 (CRI)	-10 (10°)	-NL (No Lens)	-NL (No Lens)	-00
S3-1LTL 1 Light Trimless	-BB (Burnished Bronze)	BB	BB	-30 (3000K)		-30 (30°)	-CL (Clear Lens)	-CL (Clear Lens)	
S3-2L 2 Light	-BK (Gloss Black)	BK	BK	-35 (3500K)		-50 (50°)	-FR (Frosted)	-FR (Frosted)	
S3-2LTL 2 Light Trimless	-BLU (Blue)	BLU	BLU	-40 (4000K)			-MP (Solite)	-MP (Solite)	
S3-3L 3 Light	-DVG (Dove Gray)	DVG	DVG	-WD* (Warm Dim)			-LS (Linear Spread)	-LS (Linear Spread)	
S3-3LTL 3 Light Trimless	-FLG (Flannel Gray)	FLG	FLG	*WD available with 10W or 15W options only.			-HEX (Hex Cell)	Holds 1 Media only when HEX or WW selected.	
S3-4L 4 Light Linear	-GA (Galvanized)	GA	GA				-WW (Wall Wash)		
S3-4LTL 4 Light Linear Trimless	-GWT (Gloss White)	GWT	GWT						
S3-4SQL 4 Light Square	-LG (Lime Green)	LG	LG						
S3-4SQLTL 4 Light Square Trimless	-MB (Matte Black)	MB	MB						
	-MBL (Midnight Blue)	MBL	MBL						
	-PNA (Painted Natural Aluminum)	PNA	PNA						
	-PNC (Painted Natural Copper)	PNC	PNC						
	-RD (Red)	RD	RD						
	-SGR (Sage Green)	SGR	SGR						
	-SND (Sand)	SND	SND						
	-SS (Satin Silver)	SS	SS						
	-TBZ (Textured Bronze)	TBZ	TBZ						
	-TGP (Textured Graphite)	TGP	TGP						
	-TNG (Tangerine)	TNG	TNG						
	-TTL (Tahitian Teal)	TTL	TTL						
	-WT (Semi Gloss White)	WT	WT						
	-YEL (Yellow)	YEL	YEL						

MEDIA

- S3-Lens-CL-0** (Clear Lens)
- S3-Lens-FR-0** (Frosted Lens)
- S3-Lens-MP-0** (Solite Lens)
- S3-Lens-LS-0** (Linear Spread)
- S3-Lens-HEX-0*** (Hex Louver)
- S3-Lens-WW-0*** (Wall Wash)

BEAM SPREADS

Downlight Adjustable Wall Wash

OPTICS

- S3-10-OPTIC-0** (10° Spot)
- S3-30-OPTIC-0** (30° Narrow Flood)
- S3-50-OPTIC-0** (50° Flood)

10° Spot 30° Narrow Flood 50° Flood



GYROSHIFT
MULTIPLES

**GYROSHIFT MULTIPLES
3" ADJUSTABLE DOWNLIGHT**

PROJECT: _____

TYPE: _____

NOTE: _____

SPEC-00284 GYROSHIFT-MULTIPLES, 3", V-1.3, UPDATED 10/14/2022

S3, S3F

ORDER MATRIX






HOUSING ORDER MATRIX (IC OR CHICAGO RATED NEW CONSTRUCTION BOX) (EXAMPLE: S3F-1LRC-15S-00)

HOUSING SIZE	HANGING TYPE	WATTS PER LIGHT	DRIVER	REV
S3F-1L 1 Light Housing	RI (Recessed IC)	-10 (10W)	S (ERP, Universal Dim, Triac/ELV/0-10V 1% 120-277V) <i>Forward and reverse phase dimming at 120V only.</i> L3 (Lutron Hi-Lume® Fade-to-Black 1% 120-277V) EL1 (EldoLED DALI 1% 120-277V) EL2 (EldoLED 0-10V 1% 120-277V)	-00
S3F-1LTL 1 Light Trimless Housing	RC (Recessed Chicago Rated)	-15 (15W)		
S3F-2L 2 Light Housing		-20* (20W)		
S3F-2LTL 2 Light Trimless Housing		* 20W not available with Warm Dim		
S3F-3L 3 Light Housing				
S3F-3LTL 3 Light Trimless Housing				
S3F-4L 4 Light Linear Housing				
S3F-4LTL 4 Light Linear Trimless Housing				
S3F-4SQL 4 Light Square Housing				
S3F-4SQLTL 4 Light Square Trimless Housing				



LINE DRAWINGS

S3F-1L
3" - 1 Light
Recessed Downlight

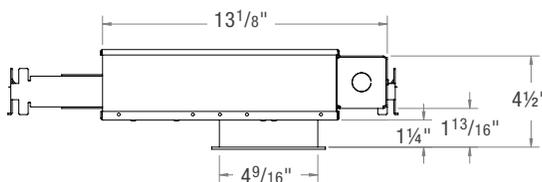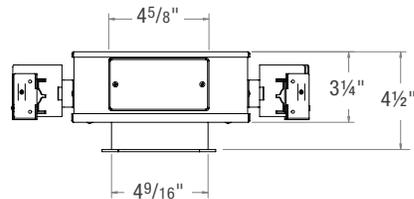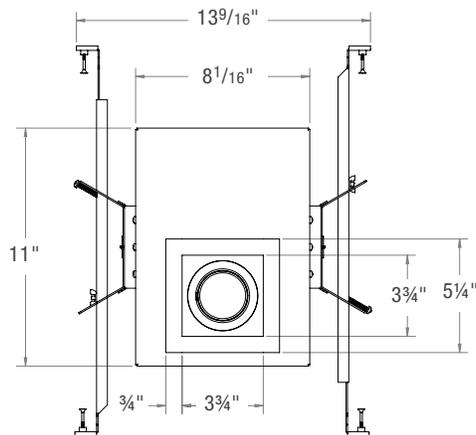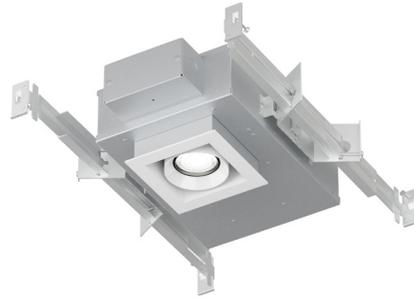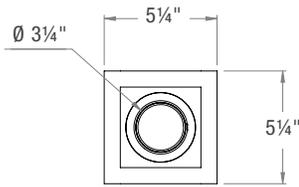

CSL

GYROSHIFT MULTIPLES

GYROSHIFT MULTIPLES 3" ADJUSTABLE DOWNLIGHT

PROJECT: _____

TYPE: _____

NOTE: _____






SPEC-00284 GYROSHIFT-MULTIPLES, 3", V-1.3, UPDATED 10/14/2022

S3, S3F

LINE DRAWINGS





S3F-1LTL

3" - 1 Light Trimless
Recessed Downlight

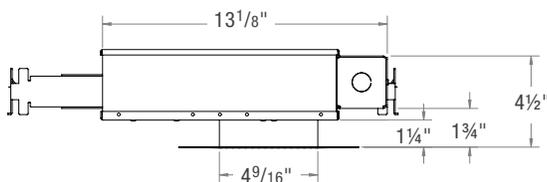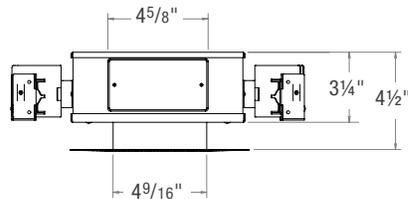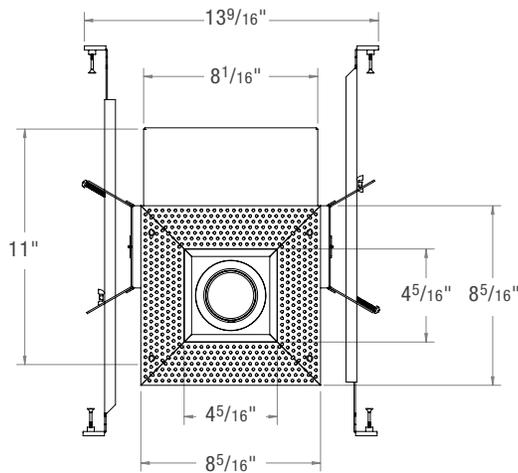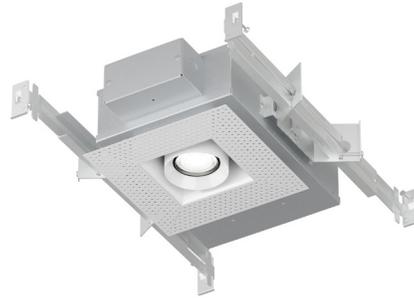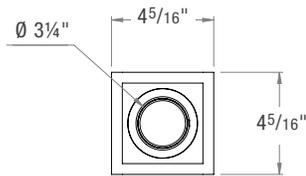

LINE DRAWINGS






S3F-2L
3" - 2 Light
Recessed Downlight

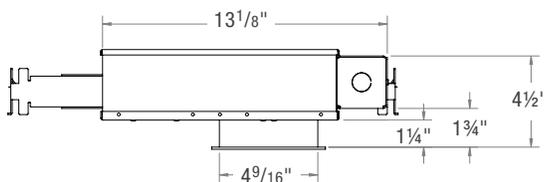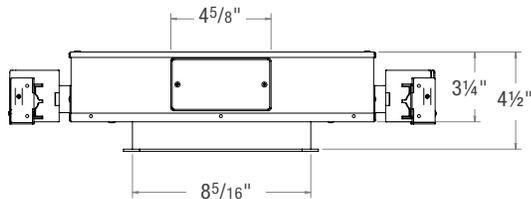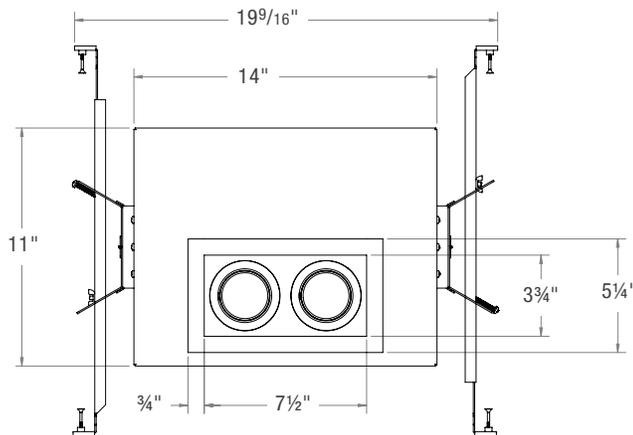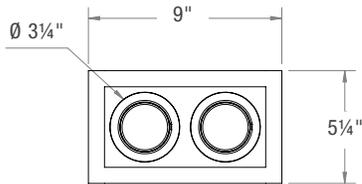

LINE DRAWINGS





S3F-2TL

3" - 2 Light Trimless
Recessed Downlight

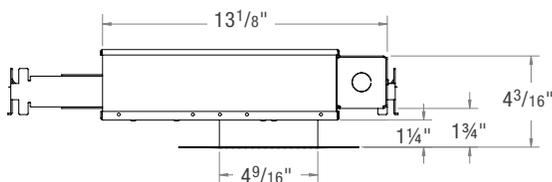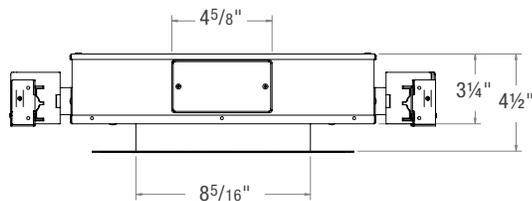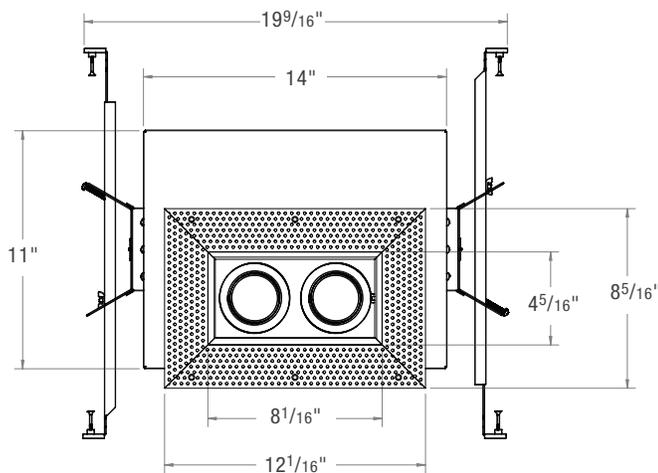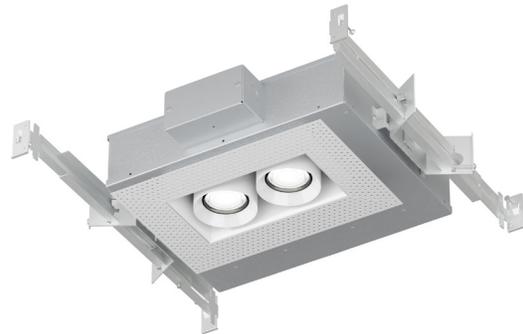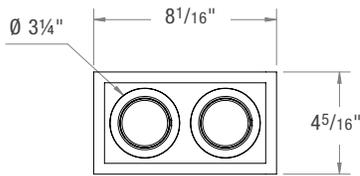

LINE DRAWINGS

S3F-3L
3" - 3 Light
Recessed Downlight

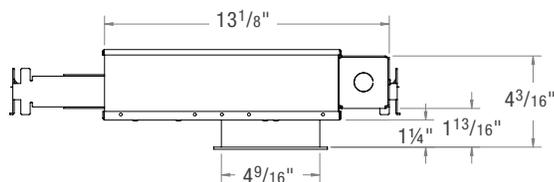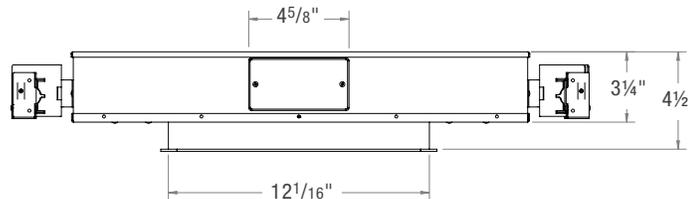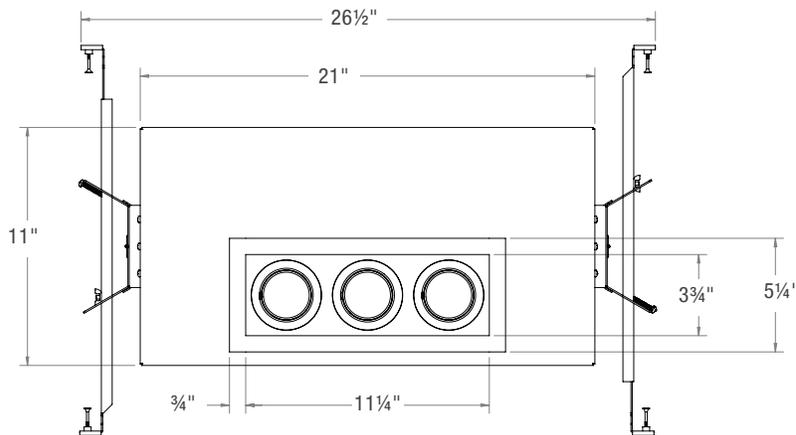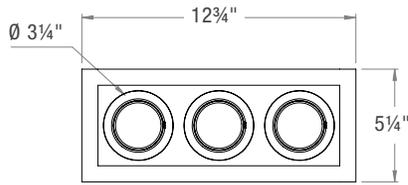

CSL

GYROSHIFT MULTIPLES

GYROSHIFT MULTIPLES 3" ADJUSTABLE DOWNLIGHT

PROJECT: _____

TYPE: _____

NOTE: _____





SPEC-00284 GYROSHIFT-MULTIPLES, 3", V-1.3, UPDATED 10/14/2022

S3, S3F

LINE DRAWINGS

S3F-3LTL

3" - 3 Light Trimless
Recessed Downlight

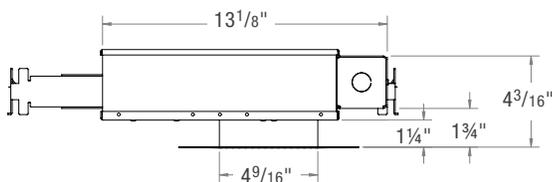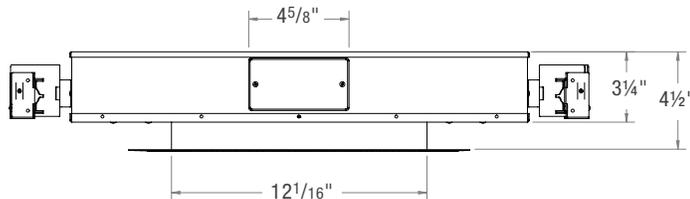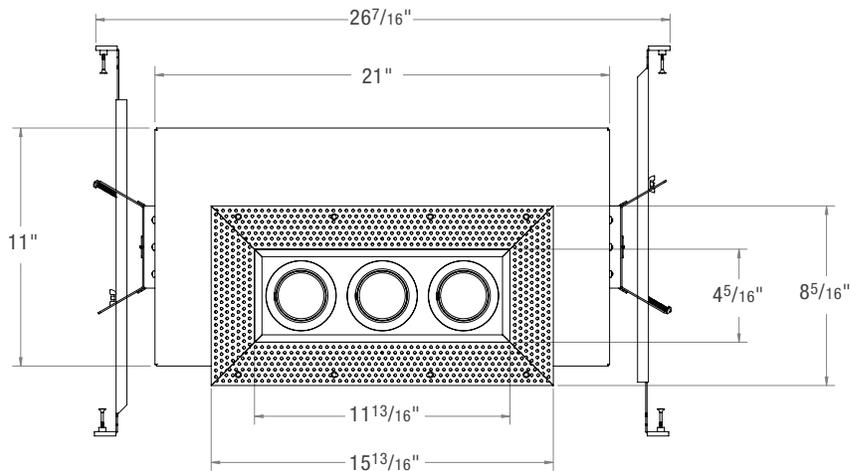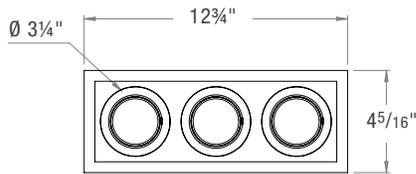



GYROSHIFT
MULTIPLES

**GYROSHIFT MULTIPLES
3" ADJUSTABLE DOWNLIGHT**

PROJECT: _____

TYPE: _____





NOTE: _____

SPEC-00284 GYROSHIFT-MULTIPLES, 3", V-1.3, UPDATED 10/14/2022

S3, S3F

LINE DRAWINGS





S3F-4L
3" - 4 Light
Recessed Downlight

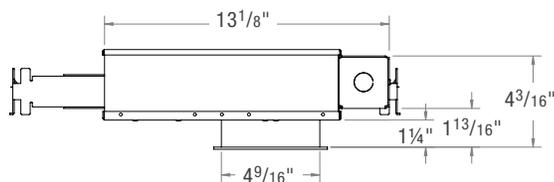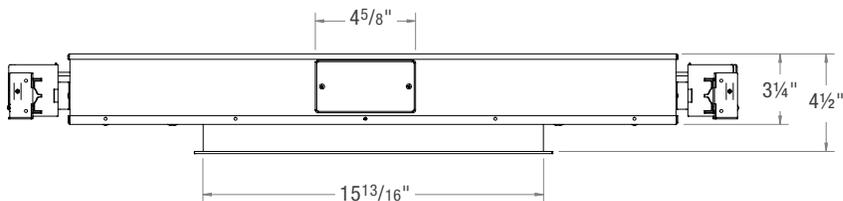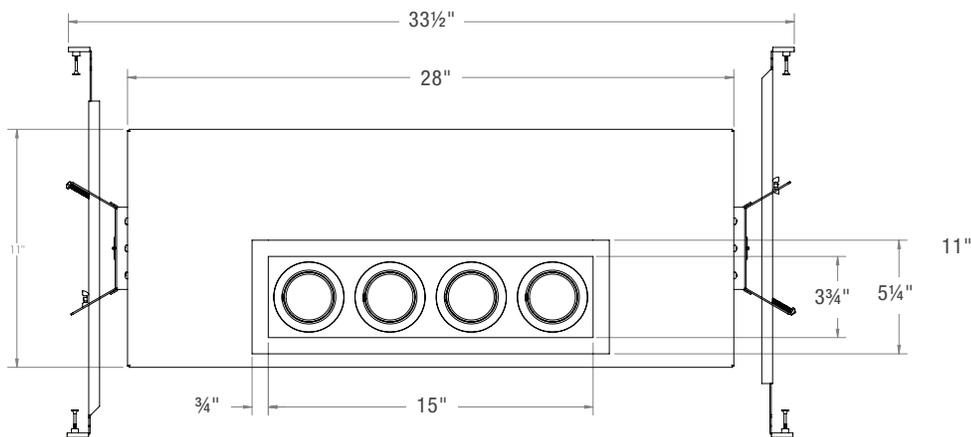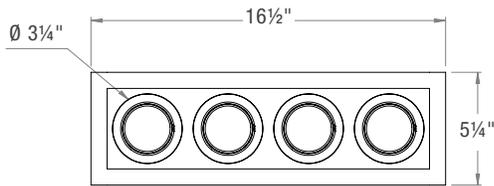

LINE DRAWINGS

S3F-4TLT

3" - 4 Light Trimless
Recessed Downlight

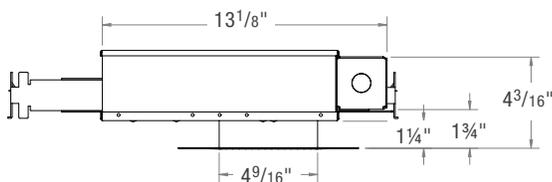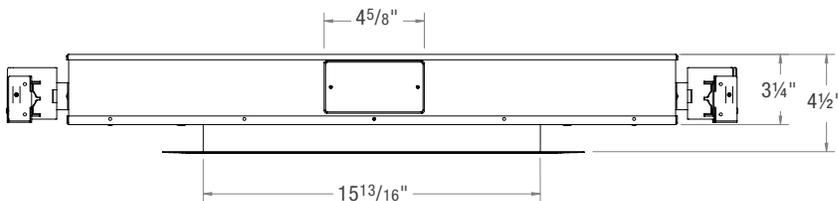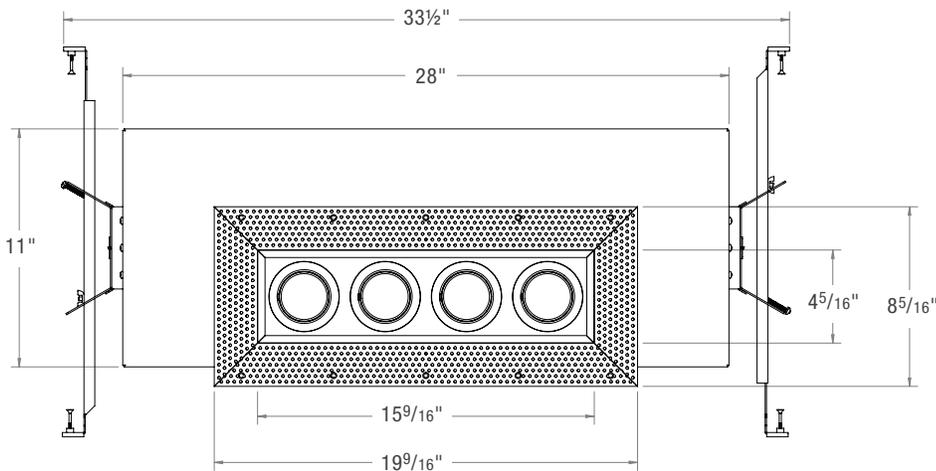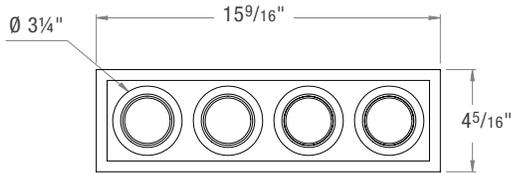

CSL

GYROSHIFT MULTIPLES

GYROSHIFT MULTIPLES 3" ADJUSTABLE DOWNLIGHT

PROJECT: _____

TYPE: _____





NOTE: _____

SPEC-00284 GYROSHIFT-MULTIPLES, 3", V-1.3, UPDATED 10/14/2022

S3, S3F

LINE DRAWINGS





S3F-4SQL
3" - 4 Light Square
Recessed Downlight

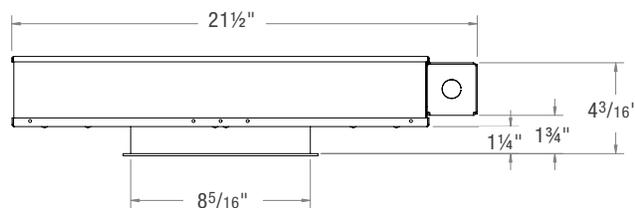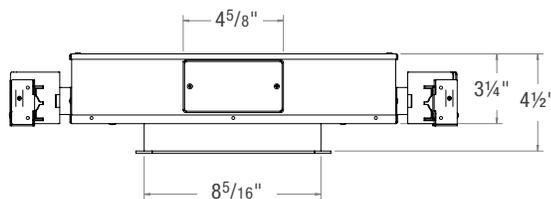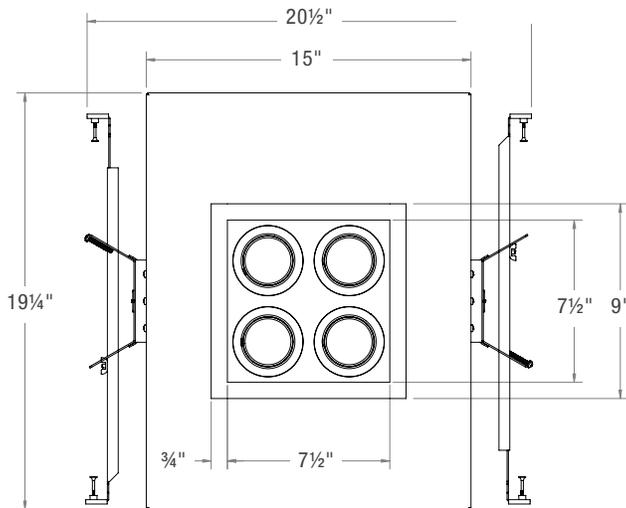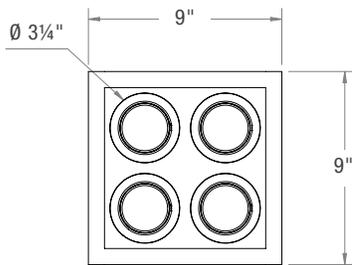

LINE DRAWINGS

S3F-4SQLTL

3" - 4 Light Square Trimless
Recessed Downlight

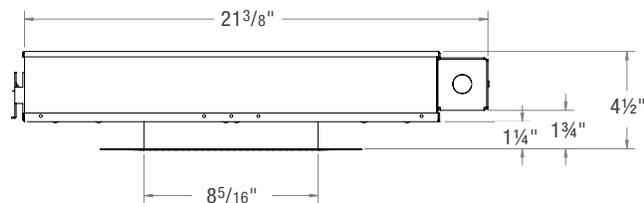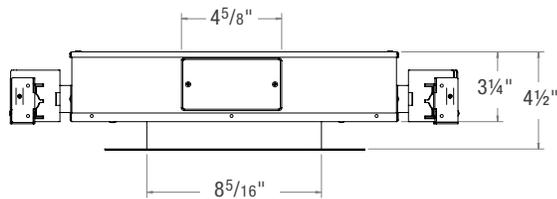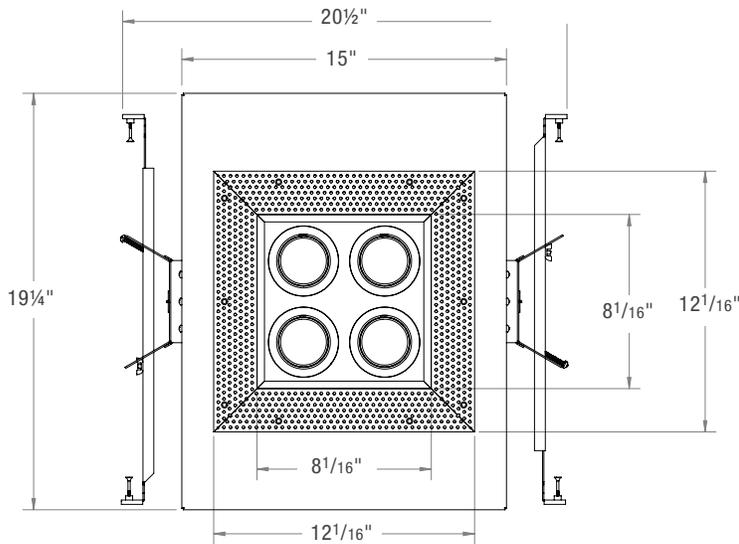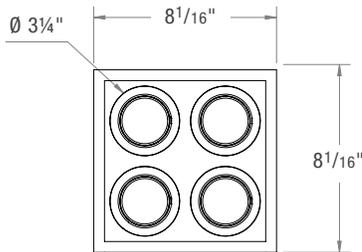

STANDARD FINISHES



ABL
Aegean Blue



BB
Burnished Bronze



BK
Gloss Black



BLU
Blue



DVG
Dove Gray



FLG
Flannel Gray



GA
Galvanized




GWT
Gloss White



LG
Lime Green



MB
Matte Black



MBL
Midnight Blue



PNA
Painted Natural Aluminum



PNC
Painted Natural Copper



RD
Red



SGR
Sage Green



SND
Sand



SS
Satin Silver



TBZ
Textured Bronze



TGP
Textured Graphite



TNG
Tangerine



TTL
Tahitian Teal



WT
Semi Gloss White



YEL
Yellow

DIMMING DRIVER COMPATIBILITY


DIMMER LIST

"S" ERP PHASE-CUT DIMMERS			
Dimmer Information			
Manufacturer	Product	Manufacturer	Product
Cooper	DAL06P	Lightolier	ZP260QEW
	DLC03P	Lutron	CT103P
	SLC03P		DV600P
Leviton	6161		DVCL-153P
	6631-2		DVELV303P
	6633-P		FAELV500
	6673-10W		LG600P
	6683-IW		MAELV600
	IPE04		S600P
	IPI06-1LZ		S-603PG
	VPE06		SELV300P
			TG-600P
			TGCL-153P

NOTES:

Wiring diagrams are examples of typical installations intended to illustrate the number of wires that must be run to fixture. These diagrams are not intended to specify all equipment necessary for a given dimming circuit. Refer to specific dimmer manufacturer's documentation for details.

S- ERP DRIVER 2 WIRE PHASE DIMMING

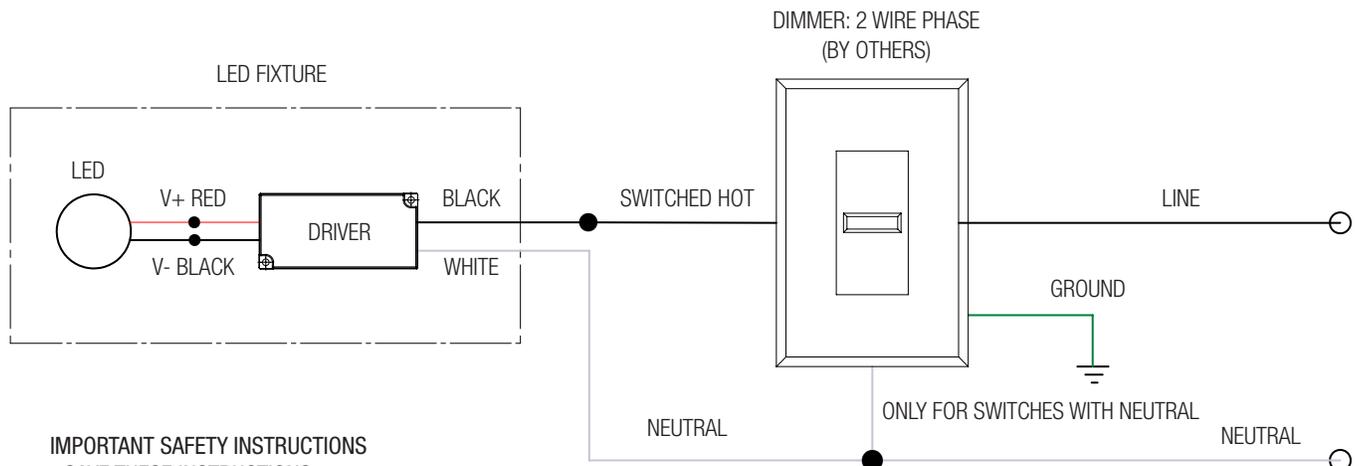

**IMPORTANT SAFETY INSTRUCTIONS
- SAVE THESE INSTRUCTIONS**

1. Keep these instructions in a safe place for future reference.
2. Only qualified electricians in accordance to local codes should install these fixtures.
3. De-energize the electrical circuit at the circuit breaker prior to installation process or servicing.
4. Make sure all connections are in accordance with the National Electrical Code and any local regulations.
5. Cap any wires not used separately (not together).

DIMMING DRIVER COMPATIBILITY


DIMMER LIST

"S" ERP 0-10V	
Dimmer Information	
Manufacturer	Product
Leviton	IP740-DLZ
Lightolier	ZP600FAM120
	V2000FAMU
Lutron	DVTV
	NTFTV
Crestron	CLS-EXP-DIMFLV
	DIN-4DIMFLV4
	DIN-A08
	GLX-DIMFLV8

NOTES:

Wiring diagrams are examples of typical installations intended to illustrate the number of wires that must be run to fixture. These diagrams are not intended to specify all equipment necessary for a given dimming circuit. Refer to specific dimmer manufacturer's documentation for details.

S- ERP DRIVER 0-10V DIMMING

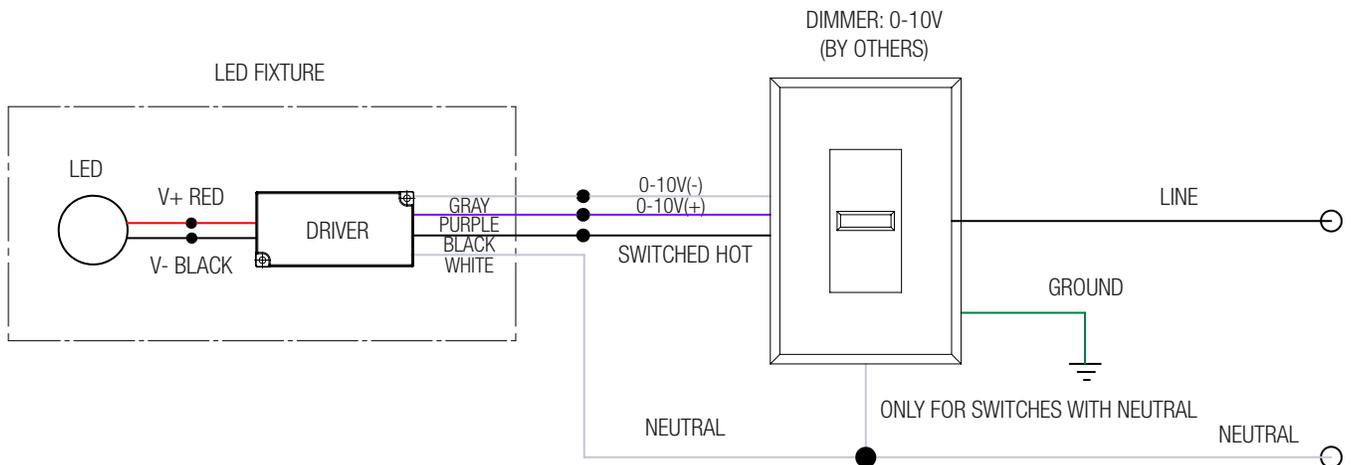

IMPORTANT SAFETY INSTRUCTIONS

- SAVE THESE INSTRUCTIONS

1. Keep these instructions in a safe place for future reference.
2. Only qualified electricians in accordance to local codes should install these fixtures.
3. De-energize the electrical circuit at the circuit breaker prior to installation process or servicing.
4. Make sure all connections are in accordance with the National Electrical Code and any local regulations.
5. Cap any wires not used separately (not together).

DIMMING DRIVER COMPATIBILITY


DIMMER LIST

"L1" Lutron Hi-lume 2-Wire	
Dimmer Information	
Manufacturer	Product
Leviton	IPE04
	IPI06-1LZ
	6633-P
Lutron	DVELV300P
	DVCL-153P
	S600P
Cooper	DAL06P
	DLC03P
	SLC03P

NOTES:

Wiring diagrams are examples of typical installations intended to illustrate the number of wires that must be run to fixture. These diagrams are not intended to specify all equipment necessary for a given dimming circuit. Refer to specific dimmer manufacturer's documentation for details.

L1- LUTRON DRIVER 2-WIRE DIMMING

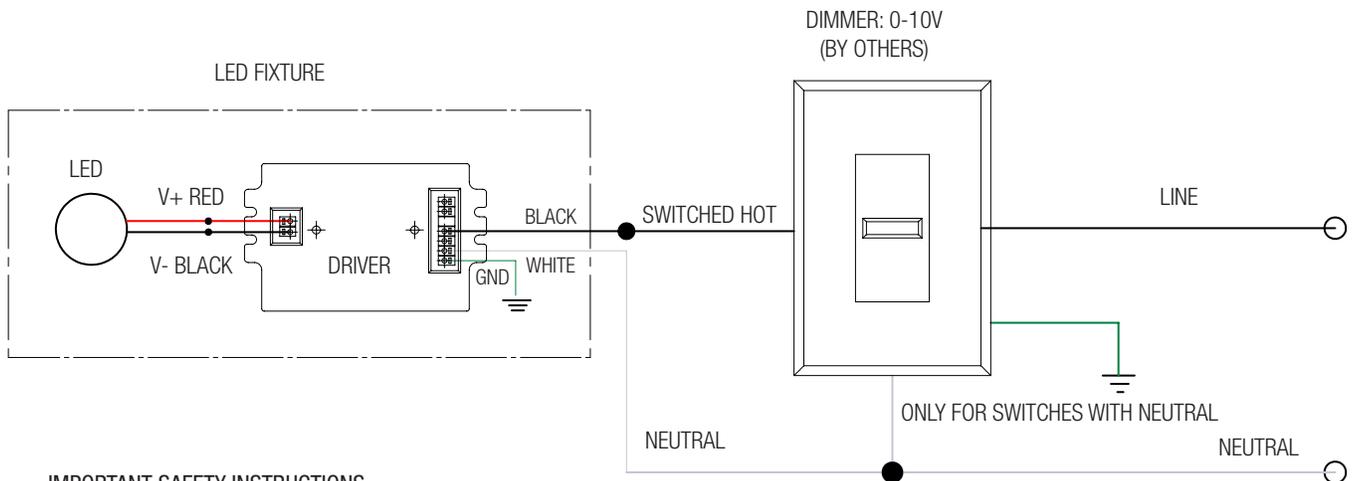

IMPORTANT SAFETY INSTRUCTIONS

- SAVE THESE INSTRUCTIONS

1. Keep these instructions in a safe place for future reference.
2. Only qualified electricians in accordance to local codes should install these fixtures.
3. De-energize the electrical circuit at the circuit breaker prior to installation process or servicing.
4. Make sure all connections are in accordance with the National Electrical Code and any local regulations.
5. Cap any wires not used separately (not together).

DIMMING DRIVER COMPATIBILITY


DIMMER LIST

"L3" Lutron Fade-to-Black	
Dimmer Information	
Manufacturer	Product
Lutron	LQSE-2ECO-D
	RMJ-ECO32-DV-B
	FCJ/FCJS-ECO
	QSN-1ECO-S
	QSN-2ECO-S
	EcoSystem ESN
	Grafik Eye QS with EcoSys-tem
	Quantum

NOTES:

Wiring diagrams are examples of typical installations intended to illustrate the number of wires that must be run to fixture. These diagrams are not intended to specify all equipment necessary for a given dimming circuit. Refer to specific dimmer manufacturer's documentation for details.

L3- LUTRON FADE-TO-BLACK DRIVER EcoSystem DIMMING

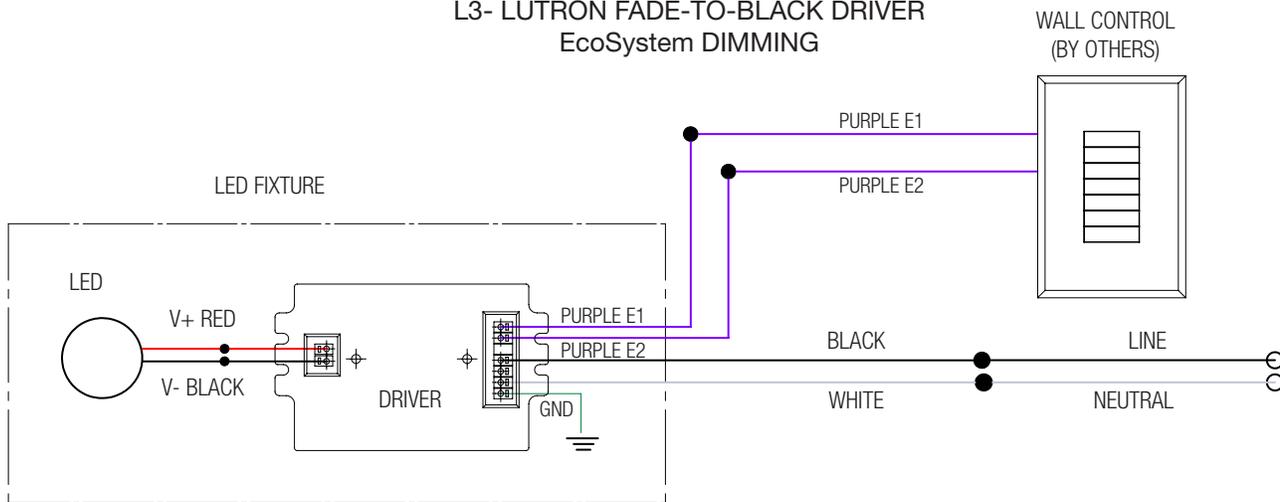

IMPORTANT SAFETY INSTRUCTIONS

- SAVE THESE INSTRUCTIONS

1. Keep these instructions in a safe place for future reference.
2. Only qualified electricians in accordance to local codes should install these fixtures.
3. De-energize the electrical circuit at the circuit breaker prior to installation process or servicing.
4. Make sure all connections are in accordance with the National Electrical Code and any local regulations.
5. Cap any wires not used separately (not together).

DIMMING DRIVER COMPATIBILITY


DIMMER LIST

"EL1" eldoLED DALI 1%	
Dimmer Information	
Manufacturer	Product
	DALI Controls

NOTES:

Wiring diagrams are examples of typical installations intended to illustrate the number of wires that must be run to fixture. These diagrams are not intended to specify all equipment necessary for a given dimming circuit. Refer to specific dimmer manufacturer's documentation for details.

EL1- eldoLED DRIVER DALI DIMMING

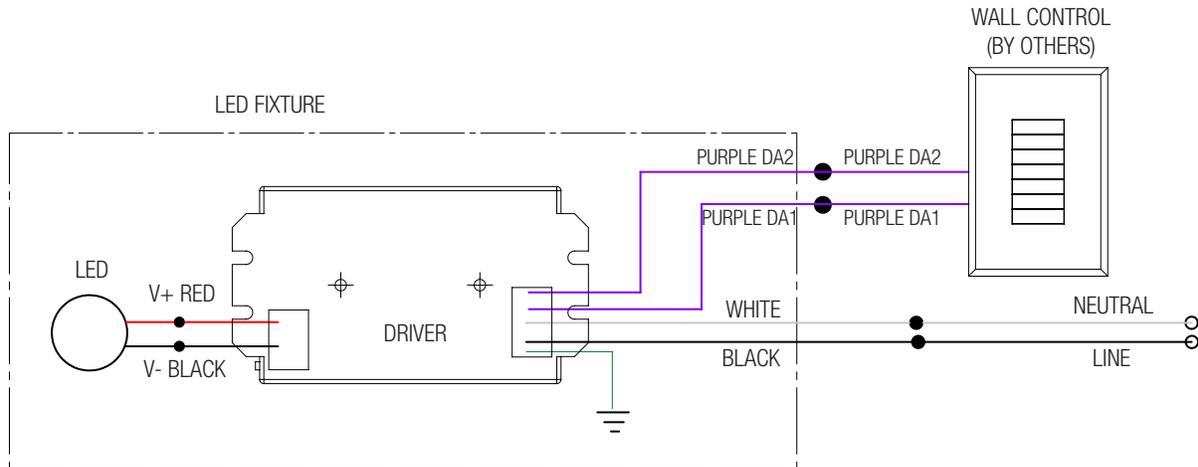

IMPORTANT SAFETY INSTRUCTIONS

- SAVE THESE INSTRUCTIONS

1. Keep these instructions in a safe place for future reference.
2. Only qualified electricians in accordance to local codes should install these fixtures.
3. De-energize the electrical circuit at the circuit breaker prior to installation process or servicing.
4. Make sure all connections are in accordance with the National Electrical Code and any local regulations.
5. Cap any wires not used separately (not together).

DIMMING DRIVER COMPATIBILITY


DIMMER LIST

"EL2"eldoLED 0-10V 1%	
Dimmer Information	
Manufacturer	Product
Leviton	IP740-DLX
Lightolier	ZP600FAM120
Lutron	DVTV
	NTFTV
	NFTV
Crestron	CLS-EXP-DIMFLV
	DIN-4DIMFLV4
	DIN-A08
	GLX-DIMFLV8

NOTES:

Wiring diagrams are examples of typical installations intended to illustrate the number of wires that must be run to fixture. These diagrams are not intended to specify all equipment necessary for a given dimming circuit. Refer to specific dimmer manufacturer's documentation for details.

EL2- eldoLED DRIVER 0-10V DIMMING

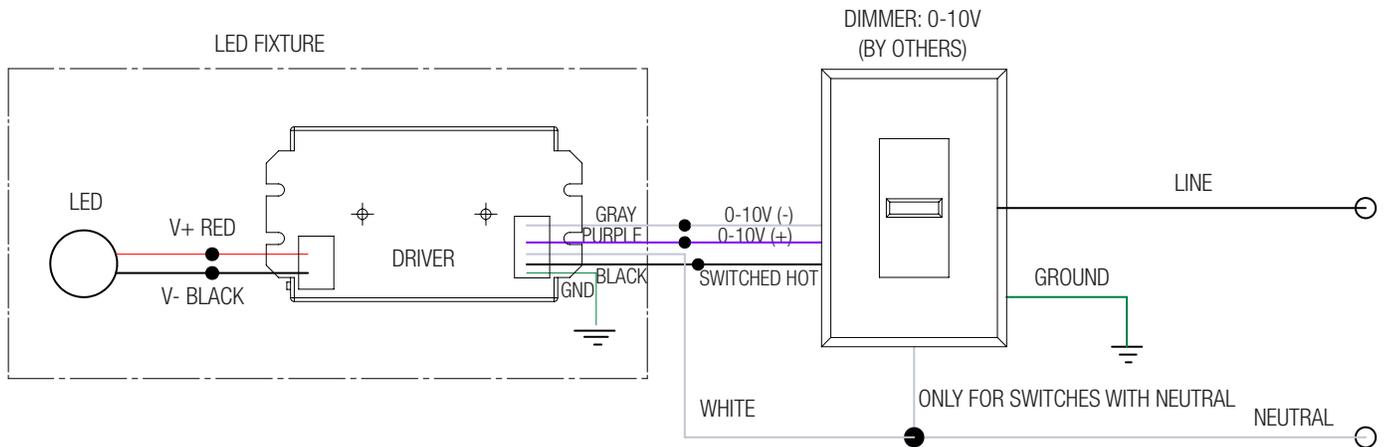

IMPORTANT SAFETY INSTRUCTIONS

- SAVE THESE INSTRUCTIONS

1. Keep these instructions in a safe place for future reference.
2. Only qualified electricians in accordance to local codes should install these fixtures.
3. De-energize the electrical circuit at the circuit breaker prior to installation process or servicing.
4. Make sure all connections are in accordance with the National Electrical Code and any local regulations.
5. Cap any wires not used separately (not together).