
3" Wall Mount Cylinder

25W LED Up and Downlight (Round or Square)

Catalog #: Type: Project: Date:

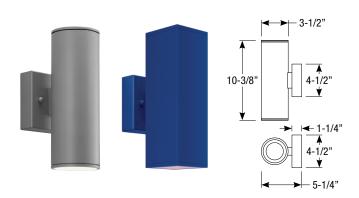

STANDA	RD FINISHES		
ABI	. (Aegean Blue)	PNC	(Painted Natural Copper)
ВВ	(Burnished Bronze)	RD	(Red)
ВК	(Gloss Black)	SGR	(Sage Green)
BLU	(Blue)	SND	(Sand)
DV	G (Dove Gray)	SS	(Satin Silver)
FLG	(Flannel Gray)	TBZ	(Textured Bronze)
GA	(Galvanized)	TGP	(Textured Graphite)
GW	T (Gloss White)	TNG	(Tangerine)
LG	(Lime Green)	TTL	(Tahitian Teal)
МВ	(Matte Black)	WT	(Semi Gloss White)
МВ	L (Midnight Blue)	YEL	(Yellow)
PN	A (Painted Natural Aluminum)		

Electrical Data (In two directions - up and down)

CCT	CRI	Wattage	Delivered Lumens	Efficacy
2700K	90 CRI	12.5 / 25W	858 / 1716lm	69lpw
3000K	90 CRI	12.5 / 25W	919 / 1838lm	74lpw
3500K	90 CRI	12.5 / 25W	987 / 1975lm	79lpw
4000K	90 CRI	12.5 / 25W	1075 / 2107lm	84lpw

Multiplier for Delivered Lumens

Wattage	10	15	20	25
Multiplier	0.45	0.69	0.83	1

Specifications

Notes:

Field Replaceable LED Light Engine

- LED with 2 SDCM binning
- 2700K, 3000K, 3500K and 4000K at 90 CRI
- 10°, 30°, 50° and 80° optics

Field Replaceable Dimming Driver

- · Multiple dimming drivers available
- Power factor > 0.9, 50/60Hz

Downlight Cylinder

. Two LEDs split one driver to offer half illumination up and half illumination down

Mounting

Square 41/2" x 11/4" backplate included with standard universal dim driver. (7½" x 6" x 1¼" backplate included with Lutron and eldoLED drivers)

Finishes

Available in 22 standard finishes with optional coastal coating to protect finish in coastal environments.

Listing / Warranty

- Five (5) year limited warranty
- UL listed to US and Canadian standards for damp location
- · Round housings rated for Wet Location when ordered with the WL canopy option and Standard ERP driver.







COMPLIĀNT

Order Matrix

3" Wall Mount Cylinder (Example: LWU3-10-35-10-10-BK-5-S)

Series	Wattage	CCT / CRI	Optic Up	Optic Down	Finish	Coastal Coating	Rev	Driver	Canopy
Round LWUD3 (Up and Down)	-10 -15 -20 -25	-27 (2700K / 90 CRI) -30 (3000K / 90 CRI) -35 (3500K / 90 CRI) -40 (4000K / 90 CRI)	-10 -30 -50 -80	-10 -30 -50 -80	-ABL (Aegean Blue) -BB (Burnished Bronze) -BK (Gloss Black) -BLU (Blue)	(blank) (No coating) -C (Coating)	-5	-S ² (ERP, Universal Dim, Triac/ELV/0-10V 1% 120-277V) -L3 ¹ (Lutron Hi-lume® Fade-to-Black 1% 120-277V)	(blank) (Damp Listed) -WL ³ (Wet Listed)
Square SLWUD3 (Up and Down) Square Housing only for use in damp locations.					-DVG (Dove Gray) -FLG (Flannel Gray) -GA (Galvanized) -GWT (Gloss White) -LG (Lime Green) -MBL (Midnight Blue) -MB (Matte Black)			-EL1 ¹ (eldoLED DALI 1% 120-277V) -EL2 ¹ (eldoLED 0-10V 1% 120-277V) -DMX ¹ (DMX 1% 120-277V)	
Emergency			-PNA (Painted Natural Aluminum) -PNC (Painted Natural Copper) -RD (Red) -SGR (Sage Green)						
EM-1000 EM-1002 EM-1003 EM-1003-C/ EM-1004 EM-1006	(10W Re (35W Re (35W Re (50W Re	emote Inverter) emote Inverter) emote Inverter) emote Inverter) Title 20 emote Inverter) emote Inverter) Emote Inverter)			-SND (Sand) -SS (Satin Silver) -TBZ (Textured Bronze) -TGP (Textured Graphite) -TNG (Tangerine) -TTL (Tahitian Teal) -WT (Semi Gloss White) -YEL (Yellow)				

Optic

EDL-10-OPTIC-5	(10° Spot)
EDL-30-OPTIC-4	(30° Spot)
EDL-50-OPTIC-4	(50° Spot)
EDL-80-OPTIC-4	(80° Spot)

1. Includes larger canopy

Forward and reverse dimming at 120V only

3. Wet Listed option only available for Round housings with Standard ERP driver