

# 1" Acrobat New Construction Shallow Plenum Baffle Downlight

## Non-IC Shallow New Construction Housing

Round or Square / Trimmed or Trimless



Wattage	CCT	Delivered Lumens	Efficacy
10W	3000K	781lm	78lpw
15W	3000K	1163lm	78lpw

Lumens will vary depending on CCT, optic & lens option

### Description

- Acrobat Non-IC Shallow Plenum downlight delivers up to 1163lm through a 1" aperture with four optical distributions. Delivered lumens are maintained in different ceiling thicknesses.
- Driver and LED are serviceable from below ceiling, access to branch circuit requires above ceiling access

### Field Replaceable LED Light Engine

- 10W, or 15W LED with 2 SDCM binning
- 2700K, 3000K, 3500K, or 4000K at 90 CRI
- Field replaceable optics available in spot, narrow, flood, or wide flood
- 50,000 hours at 70% lumen maintenance (L70)

### Field Replaceable Dimming Driver

- Power factor > 0.9, 50/60Hz
- 0-10V Dimming
- TRIAC & ELV dimming (120V only)
- Complies with IEEE62.41 surge protection

### Housing

18 gauge galvanized steel housing and junction box with 1/2" trade size knockouts. Includes universal butterfly brackets to accommodate C-Channel, adjustable bar hangers, and EMT. C-Channel is recommended for T-bar ceilings and must be ordered separately. Adjustable wood joist bar hangers are included.

### Ceiling Thickness

- Standard collar accommodates 1/2" to 5/8" ceiling thickness.
- Extended collar accommodates 1/2" to 1-1/4" ceiling thickness.
- Ultra long collar accommodates 1/2" to 2" ceiling thickness.
- See line drawing for minimum plenum depth requirements.

### Accessories

Accommodates up to two media accessories with frosted, solite, clear, and linear spread medias. Accommodates one media when hex louver is selected. Media holder accessory required to fit media.

### Shower Trim

Optional frosted, solite, or clear shower trim available. Suitable for wet location installations.

### Reflector Options

- Round reflectors available in 4 different powder coated and specular finishes.
- Square reflectors available in 4 different powder coated finishes.

### Flange Options

- Round and Square flanges available in 4 different powder coated finishes
- Flanged or trim less options

### Emergency

Remote emergency battery backup system available

### Listing/Warranty

- Five (5) year limited warranty
- UL listed to US and Canadian standards for damp locations
- UL listed to US and Canadian standards for wet locations when shower trim is installed
- Meets ASTM E283 standards
- Can be used to comply with 2016 Title 24 Part 6 high efficacy LED light source requirements
- CCEA approved – Chicago rated



### Housing Order Matrix (Example: A1-NCSP152730S-R00)

Type	Wattage	Driver	CCT / CRI	Optic	Collar Shape	Trim Style	Rev	Ceiling Thickness	Hanger Bar
A1-NCSP (Non-IC)	10 (10W)	S <sup>1,2</sup> (ERP, Universal Dim, Triac/ELV/0-10V 1% 120-277V) SR1 <sup>1</sup> (Remote ERP, Universal Dim, Triac/ELV/0-10V 1% 120-277V)	27 (2700K / 90 CRI)	10 (Spot)	-R (Round)	(blank) (Flanged)	00	(blank) (Up to 5/8")	(blank)
	15 (15W)		30 (3000K / 90 CRI)	30 (Narrow)	-S (Square)	TL (Trimless)		-1 (Up to 1-1/4")	(Standard)
			35 (3500K / 90 CRI)	50 (Flood)				-2 (Up to 2")	-LCB-24
			40 (4000K / 90 CRI)	80 (Flood)					-LCB-48 (24"C-Channel) -LCB-48 (48"C-Channel)

- Forward and reverse phase dimming at 120V only
- Driver is accessible from below ceiling

### Trim Order Matrix (Example: A1-2RWH-WH-NL-00)

Trim	Aperture	Reflector Finish	Flange Finish	Optional Shower Trim	Rev
A1-2	R (Round) S (Square)	WH (White)	(blank) (Trimless)	-NL (No Lens - damp location)	-00
		BL (Black)	-WH (White)	-FR (Frosted - wet location)	
		SA (Satin Aluminum)	-BL (Black)	-MP (Solite - wet location)	
		BZ (Bronze)	-SA (Satin Aluminum)	-CL (Clear - wet location)	
			-BZ (Bronze)		

### Accessories (Note: Media holder required)

- A1-MHLDR (Media Holder- required)
- A1-HEX (Hex Louver)
- A1-FR (Frosted Lens)
- A1-MP (Solite Lens)
- A1-CL (Clear Lens)
- A1-LS (Linear Spread Lens)

### Optics

- A1-10-OPTIC (10° Spot)
- A1-30-OPTIC (30° Narrow Flood)
- A1-50-OPTIC (50° Flood)
- A1-80-OPTIC (80° Wide Flood)


### Emergency Battery Backup

- EM-1000 (25W LED Remote Inverter)
- EM-1002 (10W LED Remote Emergency Driver)
- EM-1003 (35W LED Remote Inverter)
- EM-1004 (50W LED Remote Inverter)


**1" Acrobat New Construction Shallow Plenum Baffle Downlight** Catalog #:  
**Non-IC Shallow New Construction Housing** Project:  
 Round or Square / Trimmed or Trimless Notes:

Type:  
 Date:

**Housing Dimensions**

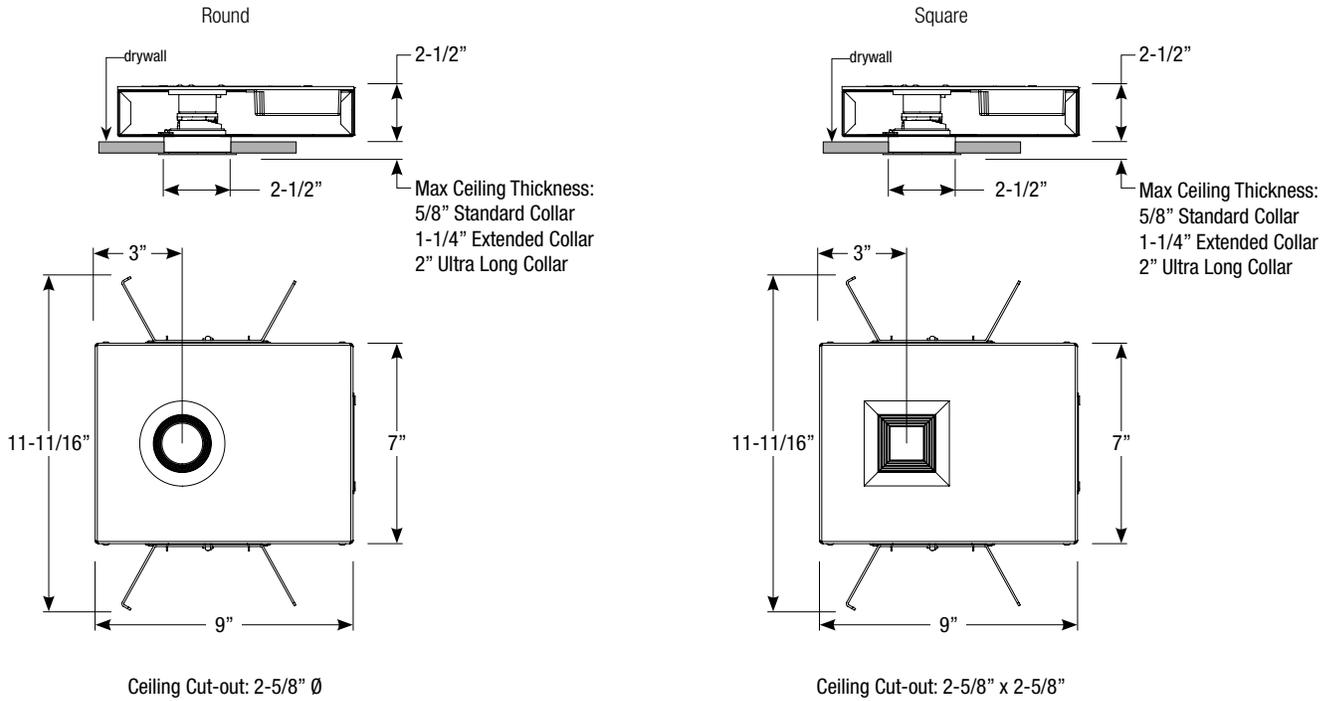

**Trim Dimensions**

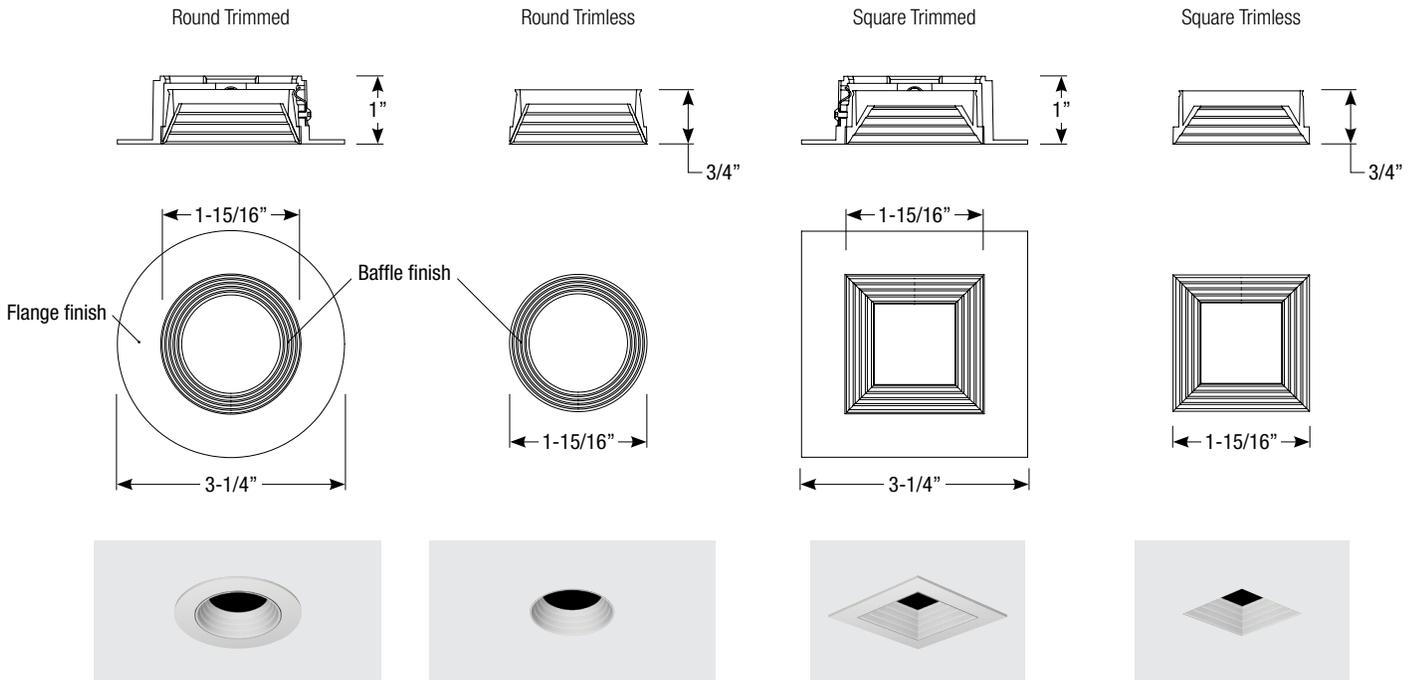

Spec-00053 Revised 10/24/2022

