

## 2" acrobat LED Pinhole Downlight

### Non-IC New Construction Housing

Round or Square / Trimmed or Trimless



Wattage	CCT	Delivered Lumens	Efficacy
10W	3000K	795lm	79lpw
15W	3000K	1184lm	79lpw
20W	3000K	1406lm	70lpw

Lumens will vary depending on CCT & optic

#### Description

- Acrobat downlight delivers over 1400lm through a 1-3/4" pinhole with four optical distributions. Delivered lumens are maintained in different ceiling thicknesses.
- No ceiling access required except for certain specified driver configurations.

#### Field Replaceable LED Light Engine

- 10W, 15W or 20W LED with 2 SDCM binning
- 2700K, 3000K, 3500K or 4000K at 90 CRI
- Field replaceable optics available in spot, narrow flood, flood or wide flood
- 50,000 hours at 70% lumen maintenance (L70)

#### Field Replaceable Dimming Driver

- Power factor > 0.9, 50/60Hz
- Multiple dimming drivers available
- Complies with IEEE62.41 surge protection

#### Housing

Non-IC rated housing must be kept a minimum of 3" from insulation. 18 gauge galvanized steel housing and junction box with 1/2" trade size knockouts. Includes universal butterfly brackets to accommodate C-Channel, adjustable bar hangers, and EMT. C-Channel is recommended for T-bar ceilings and must be ordered separately. Adjustable wood joist bar hangers are included. Max. ambient temperature: 104°F (40°C)

#### Ceiling Thickness

- Accommodates ceiling thickness from 1/2" to 1-1/2" (Extended 2" collar available, must specify)
- Delivered lumens are maintained through entire range

#### Trim Style

- Die-cast aluminum pinhole trim with powder coat finishes, consult factory for custom finishes
- Trimless mud plate and wood ceiling option available

#### Accessories

Accommodates (2) accessories, a media holder is required. Accessories are not compatible when used with lensed trim.

#### Emergency

Remote inverter operates for 90 minutes with remote test switch available, requires above ceiling access.

#### Listing/Warranty

- Patent pending
- Five (5) year limited warranty
- UL listed to US and Canadian standards for damp locations
- UL listed to US and Canadian standards for wet locations when used with lens



#### Housing Order Matrix (Example: A2-NC20S-R00-LCB-24)

Type	Wattage	Driver	Aperture	Trim Style	Rev	Extended Collar	Hanger Bar
<b>A2-NC</b> (Non-IC)	<b>10</b> (10W)	<b>S<sup>2,3</sup></b> (ERP, Universal Dim, Triac/ELV/0-10V 1% 120-277V)	<b>-R</b> (Round) <b>-S</b> (Square)	(blank) (Flanged)	<b>00</b>	(blank) (Standard 1-1/2") <b>-2</b> (Up to 2")	(blank) (Standard)
	<b>15</b> (15W)	<b>L3<sup>1</sup></b> (Lutron Hi-lume® Fade-to-Black 1% 120-277V)		<b>TL</b> (Trimless)			<b>-LCB-24</b> (24" C-Channel)
	<b>20</b> (20W)	<b>EL1<sup>1</sup></b> (eldoLED DALI 1% 120-277V)		<b>WC</b> (Wood Ceiling)			<b>-LCB-48</b> (48" C-Channel)
		<b>EL2<sup>1</sup></b> (eldoLED 0-10V 1% 120-277V)					
		<b>DMX<sup>1</sup></b> (DMX 1% 120-277V)					
		<b>SR1<sup>3</sup></b> (Remote ERP, Universal Dim, Triac/ELV/0-10V 1% 120-277V)					

- Above ceiling access requires
- Accessible from below ceiling
- Forward and reverse phase dimming at 120V only

#### Trim Order Matrix (Example: A2-3RWH-WH2730-NL-00)

Trim	Aperture	Reflector Finish	Flange Finish	CCT / CRI	Optic	Lens Type	Rev
<b>A2-3</b>	<b>R</b> (Round) <b>S</b> (Square)	<b>WH</b> (White)	(blank) (Trimless / Wood Ceiling)	<b>27</b> (2700K / 90 CRI)	<b>10</b> (Spot)	<b>-NL</b> (No Lens - damp location)	<b>-00</b>
		<b>BL</b> (Black)	<b>-WH</b> (White)	<b>30</b> (3000K / 90 CRI)	<b>30</b> (Narrow Flood)	<b>-FR</b> (Frosted - wet location)	
		<b>SA</b> (Satin Aluminum)	<b>-BL</b> (Black)	<b>35</b> (3500K / 90 CRI)	<b>50</b> (Flood)	<b>-MP</b> (Solite - wet location)	
		<b>BZ</b> (Bronze)	<b>-SA</b> (Satin Aluminum)	<b>40</b> (4000K / 90 CRI)	<b>80</b> (Wide Flood)	<b>-CL</b> (Clear - wet location)	
		<b>-BZ</b> (Bronze)					

#### Accessories (Note: Media holder required)

**A2-MHLDR** (Media Holder- required)  
**A2-HEX** (Hex Louver)  
**A2-FR** (Frosted Lens)  
**A2-MP** (Solite Lens)  
**A2-CL** (Clear Lens)  
**A2-LS** (Linear Spread Lens)

#### Optics

**A2-10-OPTIC** (10° Spot)  
**A2-30-OPTIC** (30° Narrow Flood)  
**A2-50-OPTIC** (50° Flood)  
**A2-80-OPTIC** (80° Wide Flood)

#### Emergency

**EM-1000** (25W LED Remote Inverter)  
**EM-1002** (10W LED Remote Emergency Driver)  
**EM-1003** (35W LED Remote Inverter)  
**EM-1004** (50W LED Remote Inverter)

# 2" acrobat LED Pinhole Downlight

## Non-IC New Construction Housing

Round or Square / Trimmed or Trimless

Catalog #:



Type:

Project:


Date:

Notes:

### Housing Dimensions

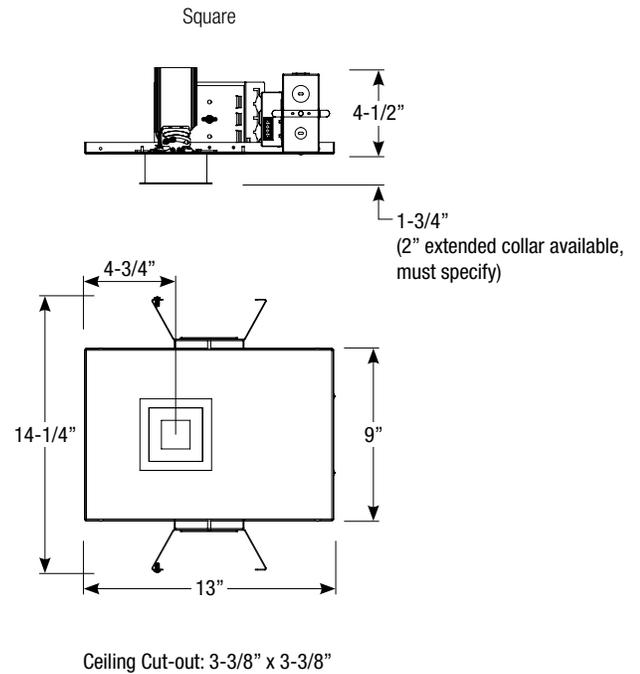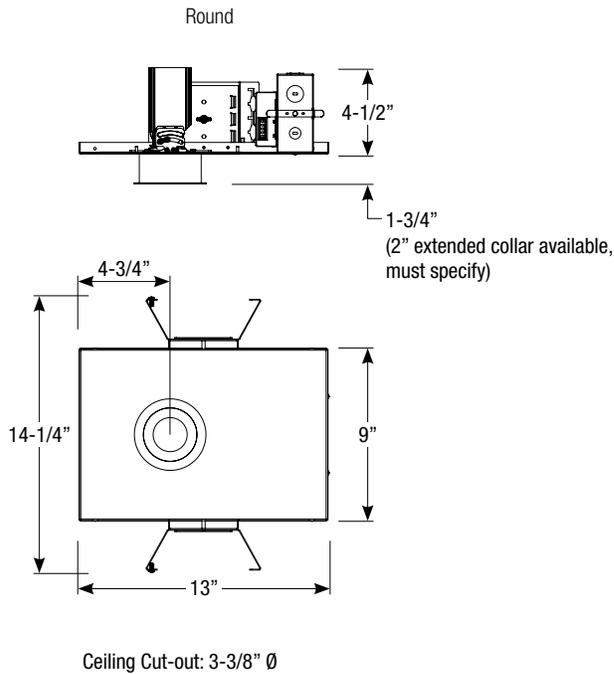

### Trim Dimensions

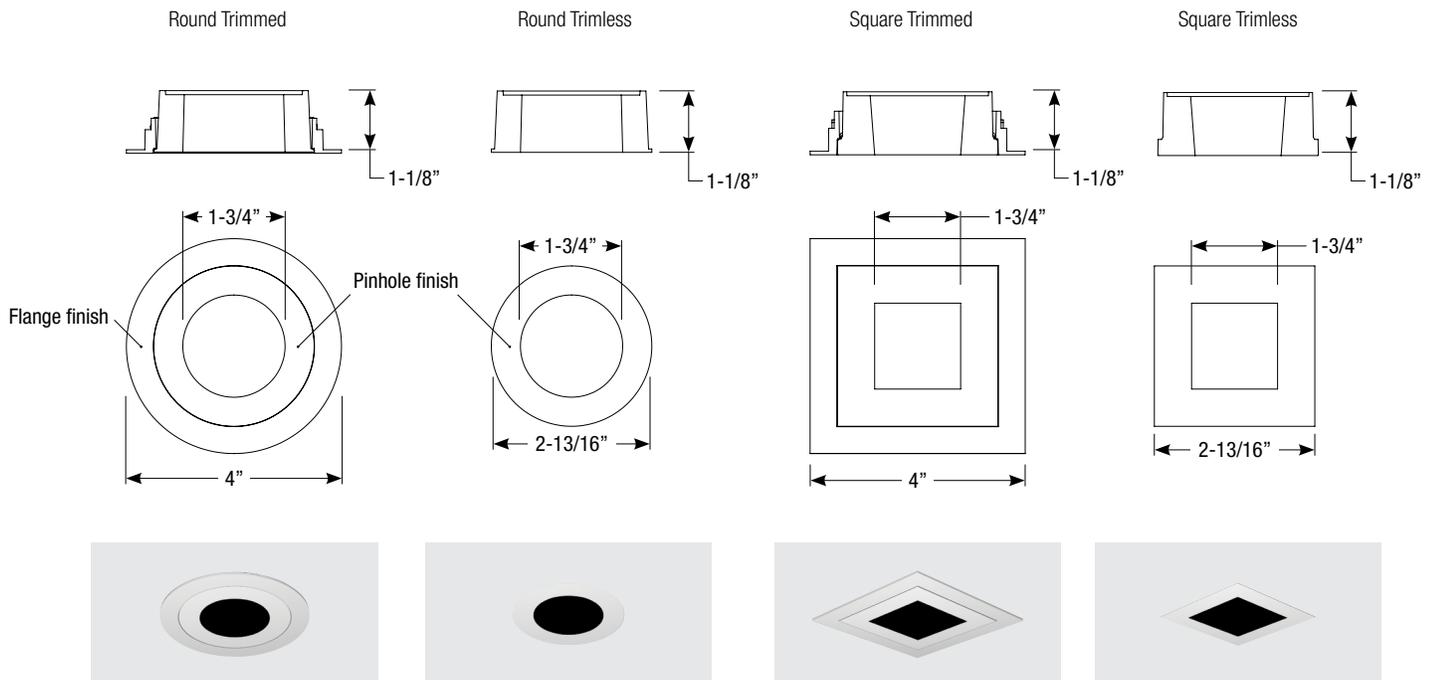

Spec-00078 Revised 10/24/2022