


## 3" Pendant, 25W LED, Round

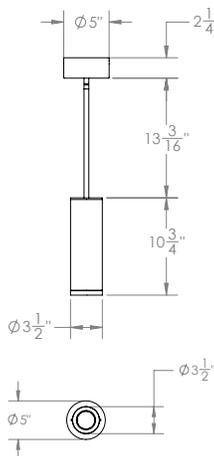

### STANDARD FINISHES

<b>ABL</b> (Aegean Blue)	<b>PNC</b> (Painted Natural Copper)
<b>BB</b> (Burnished Bronze)	<b>RD</b> (Red)
<b>BK</b> (Gloss Black)	<b>SGR</b> (Sage Green)
<b>BLU</b> (Blue)	<b>SND</b> (Sand)
<b>DVG</b> (Dove Gray)	<b>SS</b> (Satin Silver)
<b>FLG</b> (Flannel Gray)	<b>TBZ</b> (Textured Bronze)
<b>GA</b> (Galvanized)	<b>TGP</b> (Textured Graphite)
<b>GWT</b> (Gloss White)	<b>TNG</b> (Tangerine)
<b>LG</b> (Lime Green)	<b>TTL</b> (Tahitian Teal)
<b>MB</b> (Matte Black)	<b>WT</b> (Semi Gloss White)
<b>MBL</b> (Midnight Blue)	<b>YEL</b> (Yellow)
<b>PNA</b> (Painted Natural Aluminum)	

### Electrical Data

CCT	CRI	Wattage	Delivered Lumens	Efficacy
2700K	90 CRI	25W	1550 lm	62 lpw
3000K	90 CRI	25W	1640 lm	65 lpw
3500K	90 CRI	25W	1725 lm	69 lpw
4000K	90 CRI	25W	1795 lm	72 lpw
Warm Dim	-	10W	608 lm	61 lpw

Lumens will vary depending on CCT, optic & lens option

### Specifications

#### Field Replaceable LED Light Engine

- 25W LED with 2 SDCM binning
- 2700K, 3000K, 3500K and 4000K at 90 CRI
- 10°, 30° and 50° and optics included
- 45° adjustability with 360° aiming

#### Finishes

Available in many colors with optional coastal coating to protect finish in coastal environments

#### Field Replaceable Dimming Driver

- Multiple dimming drivers available
- Power factor > 0.9, 50/60Hz

#### Listing / Warranty

- Five (5) year limited warranty
- UL listed to US and Canadian standards for damp location



#### Mounting

- 4' of stem included; (1) 6", (2) 12" & (1) 18" (includes couplers)
- Contact the factory for custom sloped ceiling projects
- 10' field adjustable cord available, must specify
- 5" x 2-1/4" canopy included with standard universal dim driver (7-1/8" x 2-1/4" round included with Lutron and eldoLED drivers)

## Order Matrix

### GyroShift 3" Pendant Cylinder (Example: LP3-SFT-10S2710ABL-NLNL-ST-0)

Series	Wattage	Driver	CCT / CRI	Optic	Finishes	Coastal Coating Option	Media 1	Media 2	Option	Rev	Canopy			
LP3-SFT (Round)	-10 (10W)	S <sup>2</sup> (ERP, Universal Dim, Triac/ELW0-10V 1% 120-277V)	27 (2700K/90 CRI)	10	ABL	(blank) (No coating)	-NL (No Lens)	NL	-ST <sup>4</sup> 4' Stem	-0	(blank) (standard canopy)			
	-15 (15W)		30 (3000K/90 CRI)									-CL (Clear Lens)	CL	-BC 10' Black Cord
	-20 (20W)		35 (3500K/90 CRI)									-FR (Frosted Lens)	FR	-WC 10' White Cord
	-25 (25W)	40 (4000K/90 CRI)	-MP (Solite Lens)									MP	-LV <sup>3</sup> 10' Low Voltage Aircraft Cable	
		L3 <sup>1</sup> (Lutron Hi-Lume <sup>®</sup> Fade-to-Black 1% 120-277V)	WD* (1850-3000K)		BLU		-LS (Linear Spread)	LS			-CC2 (Conduit 3-7/8" canopy)			
		EL1 <sup>1</sup> (eldoLED DALI 1% 120-277V)			DVG		-HEX* (Hex Louver)							
		EL2 <sup>1</sup> (eldoLED 0-10V 1% 120-277V)			FLG		-WW* (Wall Wash)							
		DMX <sup>1</sup> (DMX 0.1% 120-277V)			GA									
					GWT									
					LG									
					MB									
					MBL									
					PNA									
					PNC									
					RD									
					SGR									
					SND									
					SS									
					TBZ									
					TGP									
					TNG									
					TTL									
					WT									
					YEL									

1. Includes larger canopy
2. Forward and reverse dimming at 120V only
3. Damp location Rated
4. Stem kit includes: (1) x 6", (2) x 12", (1) x 18"
5. CC1 and CC2 only for S driver option

### Media

<b>S3-LENS-CL-0</b> (Clear Lens)	<b>S3-LENS-LS-0</b> (Linear Spread)	*Note: Can only fit 1 media if HEX or WW is selected
<b>S3-LENS-FR-0</b> (Frosted Lens)	<b>S3-LENS-HEX-0*</b> (Hex Louver)	
<b>S3-LENS-MP-0</b> (Solite Lens)	<b>S3-LENS-WW-0*</b> (Wall Wash)	

### Emergency

<b>EM-1000</b> (25W LED Remote Inverter)
<b>EM-1002</b> (10W LED Remote Emergency Driver)