

2" Wall Mount Cylinder

15W LED Up and Downlight (Round or Square)


Catalog #:

Type:

Project:

Date:

Notes:

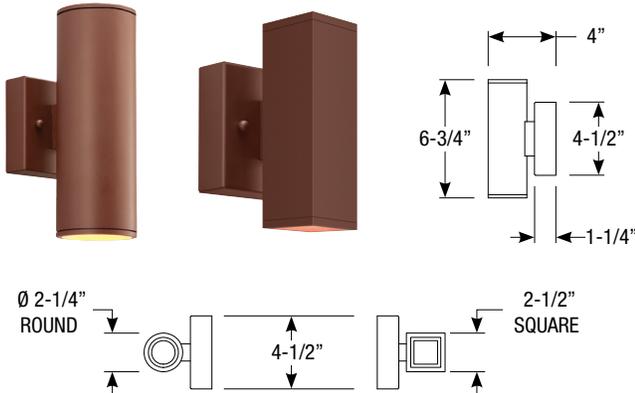

STANDARD FINISHES

ABL (Aegean Blue)	PNC (Painted Natural Copper)
BB (Burnished Bronze)	RD (Red)
BK (Gloss Black)	SGR (Sage Green)
BLU (Blue)	SND (Sand)
DVG (Dove Gray)	SS (Satin Silver)
FLG (Flannel Gray)	TBZ (Textured Bronze)
GA (Galvanized)	TGP (Textured Graphite)
GWT (Gloss White)	TNG (Tangerine)
LG (Lime Green)	TTL (Tahitian Teal)
MB (Matte Black)	WT (Semi Gloss White)
MBL (Midnight Blue)	YEL (Yellow)
PNA (Painted Natural Aluminum)	

Electrical Data (In two directions - up and down)

CCT	CRI	Wattage	Delivered Lumens	Efficacy
2700K	90 CRI	7.5W / 15W	410 / 821lm	55lpw
3000K	90 CRI	7.5W / 15W	440 / 880lm	59lpw
3500K	90 CRI	7.5W / 15W	473 / 947lm	63lpw
4000K	90 CRI	7.5W / 15W	475 / 947lm	63lpw

Multiplier for Delivered Lumens

Wattage	10	15
Multiplier	0.69	1

Specifications

LED Light Engine

- LED with 2 SDCM binning
- 2700K, 3000K, 3500K and 4000K at 90 CRI
- 10°, 30°, 50° and 80° optics

Finishes

Available in 22 standard finishes with optional coastal coating to protect finish in coastal environments.

Field Replaceable Dimming Driver

- Multiple dimming drivers available
- Power factor > 0.9, 50/60Hz

Listing / Warranty

- Five (5) year limited warranty
- UL listed to US and Canadian standards for damp locations
- ADA Compliant
- Round housings rated for Wet Location when ordered with the WL canopy option and Standard ERP driver.

Downlight Cylinder

- Two LEDs split one driver to offer half illumination up and half illumination down

Mounting

Square 4-1/2" x 1-1/4" canopy included with standard universal dim driver.
 (7-1/2" x 6" x 1-1/4" canopy included with Lutron and eldoLED drivers)



Order Matrix

2" Wall Mount Cylinder (Example: LWUD2-10-35-10-BK-4-S)

Series	Wattage	CCT / CRI	Optic Up	Optic Down	Finish	Coastal Coating	Rev	Driver	Canopy
Round LWUD2 (Up and Down)	-10 -15	-27 (2700K / 90 CRI) -30 (3000K / 90 CRI) -35 (3500K / 90 CRI) -40 (4000K / 90 CRI)	-10 -30 -50 -80	-10 -30 -50 -80	-ABL (Aegean Blue) -BB (Burnished Bronze) -BK (Gloss Black) -BLU (Blue) -DVG (Dove Gray) -FLG (Flannel Gray) -GA (Galvanized) -GWT (Gloss White) -LG (Lime Green) -MBL (Midnight Blue) -MB (Matte Black) -PNA (Painted Natural Aluminum) -PNC (Painted Natural Copper) -RD (Red) -SGR (Sage Green) -SND (Sand) -SS (Satin Silver) -TBZ (Textured Bronze) -TGP (Textured Graphite) -TNG (Tangerine) -TTL (Tahitian Teal) -WT (Semi Gloss White) -YEL (Yellow)	(blank) (No coating) -C (Coating)	-4	-S² (ERP, Universal Dim, Triac/ELV/0-10V 1% 120-277V) -L3¹ (Lutron Hi-lume® Fade-to-Black 1% 120-277V) -EL1¹ (eldoLED DALI 1% 120-277V) -EL2¹ (eldoLED 0-10V 1% 120-277V) -DMX¹ (DMX 1% 120-277V)	(blank) (Damp Listed) -WL³ (Wet Listed)
Square SLWUD2 (Up and Down) Square Housing only for use in damp locations.									

Emergency

EM-1000	(25W Remote Inverter)
EM-1002	(10W Remote Inverter)
EM-1003	(35W Remote Inverter)
EM-1003-CA	(35W Remote Inverter) Title 20
EM-1004	(50W Remote Inverter)
EM-1006	(25W Remote Inverter) Title 20

Optic

EDLM-10-OPTIC-3	(10° Spot)
EDLM-30-OPTIC-3	(30° Spot)
EDLM-50-OPTIC-3	(50° Spot)
EDLM-80-OPTIC-3	(80° Spot)

- Includes larger canopy
- Forward and reverse dimming at 120V only
- Wet Listed option only available for Round housings with Standard ERP driver

Spec-00234 Revised 10/14/2022

14508 Nelson Ave. City of Industry, CA 91744 • tel: 626.336.4511 • fax: 626.330.4266 • www.cslighting.com
 ©2021 Creative Systems Lighting, A Division of Troy-CSL Lighting, Inc.
 All rights reserved. Subject to change without notice.

