

IN STALLATION GUIDE SCONCE | WALL

READ AND FOLLOW ALL SAFETY INSTRUCTION! SAVE THESE INSTRUCTIONS AND DELIVER TO OWNER AFTER INSTALLATION.

WARNING: RISK OF ELECTRIC SHOCK

- Before installation, servicing, or peforming routine maintenance DISCONNECT POWER BY TURNING OFF THE CIRCUIT breakers both to the outlet box and to its associated wall switch
- Installation and service of luminaires should be performed by a qualified licensed electrician in accordance with all local and National Electical Codes
 DO NOT install damaged product
- DO NOT install damaged product
 Verify that supply voltage is correct by comparing it
- with the luminaire label information

 All wiring connections should be capped with UL approved recognized wire connectors

WARNING: RISK OF INJURY

- Allow luminaire to cool before servicing and performing maintenace
- Follow all manufacturer's warnings and restrictions for: driver type, mounting locations, replacement and recycling
- Wear safety glasses and gloves when installing, maintaining or servicing Avoid direct eye exposure to the light source while it

↑ WARNING: RISK OF PRODUCT DAMAGE

- Never connect components under load
- Do not touch the yellow surface of the LED as it may damage the light engine

/ WARNING


● DO NOT seperate any other wires that may be in the box
● DO NOT damage the insulation of older wiring
In regular circumstances the Black wire will be the "Hot" lead
and the WHITE wire will be the "Neutral" or "Common" lead
A GREEN or BARE COPPER wire is "Ground". In older building
it is always good practice to reconfirm the polarity of the wiring

NOTICE

 This fixture is designed to be mounted on a correctly installed standard round or cotagon box or a through wiring box with a plaster frame. The box must be securely mounted to the structure of the building. The crossbar and hardware supplied should be used. Directly mounting the fixture to the outlet box may make it impossible to correctly align the fixture.


STEP 1 - INSTALL COVER PLATE

ATTACH COVER PLATE TO JUNCTION-BOX WITH SCREWS (8-32 x 3/8")



STEP 2 - MAKE ELECTRICAL CONNECTION

ATTACH WIRES WITH THE SAME COLOR USING APPROVED FASTENERS OR ELECTRICAL TAPE

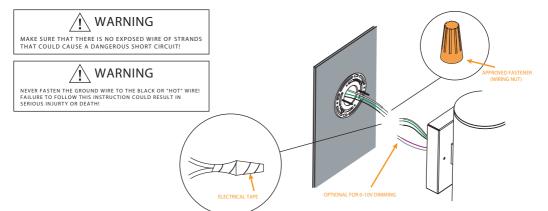



IN STALLATION GUIDE SCONCE| WALL

STEP 3 - CANOPY COVER

ATTACH CANOPY TO PLATE WITH STUD (8-32 x 3/8") AND BALL NUTS

